

# Granite Ridge Shingle Install Guide

Concealed Fastened - Direct to Deck



### NOTICE

These installation guidelines demonstrate optional installation techniques for Unified Steel™ stone coated roof panels and accessories. Options are dependent upon chosen design, install method, and performance requirements of a given project.

### INSTALLATION WARNING

The details and information in this document reflect current roofing practices used in the United States. Installers of Unified Steel™ roof panels and accessories should have knowledge of roof structures, an understanding of how to work with stone coated steel panels and accessories, and experience working with sloped roofs.

We recommend that installers of Unified Steel™ roof products use a Unified Steel™ Cutter\* and Bender, and have completed an *Installer Orientation Training Program* for each profile installed (contact your Territory Manager for details at [WestlakeRoyalRoofing.com/Territory Manager](https://WestlakeRoyalRoofing.com/TerritoryManager)). Unified Steel™ does not consider its products to be “do-it-yourself” (D.I.Y.) mainly due to specialized cutting and bending tools used during installation.



***Panels are susceptible to scuffing from foot traffic when subjected to prolonged periods of water saturation, do not install wet. See "Installing Panels When Wet" Technical Bulletin.***

**Note: Circular saw or grinder wheel to cut panels is not acceptable.**



*Indicates critical areas of installation.*

## TABLE OF CONTENTS

GENERAL INSTALLATION STEPS.....	2
SAFETY NOTES.....	2
GENERAL INFORMATION.....	3
GRANITE-RIDGE PANEL AND STONE COATED ACCESSORIES.....	4
PAINTED OR BARE ACCESSORIES.....	5
OTHER ACCESSORIES & ROOF SYSTEM COMPONENTS .....	5-6
TOOLS.....	6
WALKING ON YOUR ROOF .....	7
UNDERLAYMENT .....	8
STARTER STRIP .....	8
RAKE/ROOF-TO-WALL & RAKE COVER .....	8
VALLEY FIVE 'V' WITH EXIT TRAY .....	9
WAKAFLEX® UNIVERSAL FLASHING.....	9
VALLEY 2-PC CLOSED WITH EXIT TRAY.....	10
PANEL LAYOUT AND FASTENING .....	11
RAKE PANEL SECTIONS.....	12
HIP PANEL SECTIONS - BARRIER FOAM METHOD / OVERLAP METHOD.....	13
VALLEY PANEL SECTIONS WITH VALLEY FIVE 'V' .....	14
VALLEY CENTER COVER INSTALLATION .....	14
DORMER VALLEY EXIT - FLAT SHEET METHOD/ WAKAFLEX® FLASHING.....	15
PIPE FLASHING - SANDWICH METHOD.....	16
CHIMNEY / SKYLIGHT DETAIL .....	17-18
SHORT COURSE DETAIL.....	19
RIDGE CUT SECTIONS - BARRIER FOAM METHOD / OVERLAP METHOD / CONTINUOUS RIDGE VENT .....	20
HIP STARTER DETAIL .....	21
HIP TRIM CAPS & HIP/RIDGE INTERSECTION - BARRIER FOAM METHOD.....	22
RIDGE TRIM CAPS SHINGLE - BARRIER FOAM METHOD / CONTINUOUS RIDGE VENT .....	23
RIDGE TRIM CAPS COTTAGE - RIDGEMASTER® PLUS CONTINUOUS RIDGE VENT .....	24
FINISHING TOUCHES.....	24
HIGH VELOCITY HURRICANE ZONE (HVHZ) FASTENING GUIDELINES.....	25

## INSTALLATION TOOLS

### UNIFIED STEEL™ INSTALLATION KIT

- CUTTER
- BENDER

### HAND TOOLS

- IMPACT DRIVER
- RED & GREEN SNIPS
- 3" HAND SEAMERS
- NAIL GUN
- HAMMER
- CAULKING GUN
- STANDARD SLOT SCREWDRIVER

### OTHER TOOLS

- TAPE MEASURE
- STRING-LINE
- SOAP STONE (used to mark panels)

## GENERAL INSTALLATION STEPS

GRANITE-RIDGE Shingles are installed on new or existing roofs pitched **3:12 and above**. These install details are designed to be used in conjunction with Unified Steel's *Installer Orientation Training Program*.

### Unified Steel™ Roof Products - 12 Basic Steps to a Great Job:

1. Install eave metal **STARTER STRIP**.
2. Install code-compliant **UNDERLAYMENT** (minimum ASTM 1970 self-adhering membrane ensuring that the underlayment finishes on top of the eave metals. In extreme weather areas, high rain or snow fall, the underlayment may run below and then be striped in over the top to sandwich the Starter.
3. Install **RAKE/ROOF-TO-WALL** at rakes and walls.
4. Install **RAKE COVER** onto the Rake/Roof-to-Wall.
5. Install **VALLEY** Metals.
6. Install field **PANELS** from the bottom left and work to the right and up the roof. Lay field panels with the correct offset/stagger.
7. Measure, mark and cut - **RAKE, HIP, VALLEY and RIDGE** panel sections.
8. Install **CHAR FOAM FILTER** and **VALLEY CENTER COVER** metal.
9. Install **PIPE** Flashings - Pipe-Jacks, Sleeves, etc.
10. Install **CHIMNEY** flashings panel sections.
11. Install **TRIM CAPS** on hip and ridge.
12. **TOUCH-UP** any areas that may be required.

## SAFETY NOTES



The safety tips provided here are for general awareness of the user. Unified Steel™ assumes no liability or responsibility for incorrect use of the products or any personal injury that may be caused as a result of use.

- Select an open area and establish a safe working perimeter to set up tools. Instruct anyone near the safe working area.
- Inspect each tool before use. Do not use a tool that is not in good working condition. Regularly maintain tools for best performance.
- Wear personal protective equipment.
- Be aware of "pinch points" and keep hands and clothing away from such areas.



## GENERAL INFORMATION

### CONCEALED FASTENED:

GRANITE-RIDGE Shingle panels are CONCEALED fastened. When installed as described in these guidelines, they use vertically positioned fasteners across the back flange spaced approximately 6" o/c.

<b>Overall Length Range:</b>	<b>46.0625" (11170 mm)</b>
<b>Exposure:</b>	<b>13.6875" (348 mm)</b>
<b>Side-Lap:</b>	<b>2" (50 mm)</b>
<b>Fastening Flange:</b>	<b>0.75" (19 mm)</b>
<b>Panel Weight:</b>	<b>5.40 lbs (2.45 Kg)</b>

### MATERIALS

The panels are produced from AZ-50, Aluminum-zinc alloy coated steel complying with ASTM A792.

### PACKING AND STORAGE

A pallet of panels contains approximately 16 squares. Care should be taken to store panels in an area free from moisture. Refer to pallet storage warning information for more details.

### ROOF DECK SHEATHING

The panels must be installed on a minimum 15/32" thick (11.9 mm) plywood, close fitted sheathing or spaced sheathing that complies with the applicable code.

### ROOF PITCH

GRANITE-RIDGE Shingle panels must be installed on a minimum roof pitch of 3:12 (14.04 degrees) or above. Roof slopes below 3:12 mean the panels act as a decorative roof covering only.

### ROOFING UNDERLAYMENT

Minimum one-layer ASTM D1970 fully adhered membrane, minimum head lapped 2" (50 mm) and end lapped 6" (152 mm) or approved equal per code.

### SEALANT/CAULKING

Only exterior grade urethane or (non-acidic) silicone caulking should be used for sealant.

### FASTENERS

All fasteners (Screws or Nails) used on a Unified Steel™ system shall meet or exceed the corrosion resistant standard as defined in ASTM B-117, (1,000-hr minimum Salt Spray Corrosion Resistance).

Panel fasteners shall be of sufficient length to penetrate into the roof deck a minimum of 0.75" (19 mm).

For High Velocity Hurricane Zone (HVHZ) areas [refer to Page 25](#) for specific details.

### TESTING

The panels have been tested and evaluated and are covered by Code Evaluation Report (QAI CERus-1008), the International Code Council Evaluation Service Report ICC-ESR-1188, Florida Building Code Report FL 27408 and Canadian Construction Materials Centre CCMC Evaluation Report 14113R. Testing has been conducted to evaluate fire, wind, impact, water infiltration, and durability. Information regarding specific tests and approvals can be obtained from Unified Steel™.

### VENTILATION

Ensure proper attic ventilation as prescribed per local codes. Ridge venting can be installed to help achieve adequate attic ventilation.

### WARRANTY

The panels carry a limited warranty for fifty years. This limited warranty is transferable and does not cover damage due to improper handling or installation. Complete warranty details available at [WestlakeRoyalRoofing.com](http://WestlakeRoyalRoofing.com).

### DISSIMILAR METALS



*To avoid adverse corrosion effects caused by dissimilar metals, COPPER and LEAD flashings should not be used with Unified Steel™ panels and accessories.*


### FINISH COATING

Minor scuffing of the stone coated finish can be repaired with a Touch-Up Kit. Use the Unified Steel™ Touch-Up Kit for repairs. Colored aerosol paints should never be used as "touch-up" on stone coated products.




*Colored aerosol paints should never be sprayed on stone coated panels and accessories.*

## GRANITE-RIDGE PANEL AND STONE COATED ACCESSORIES

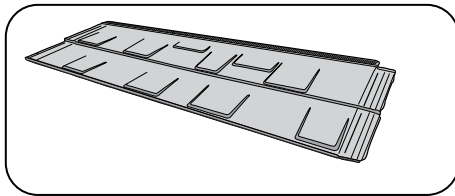


### GRANITE-RIDGE Shingle Panel

Cover: 13.6875" x 44" (348 x 1117 mm)  
5.4 lbs (2.45 Kg) 24 pcs/sq

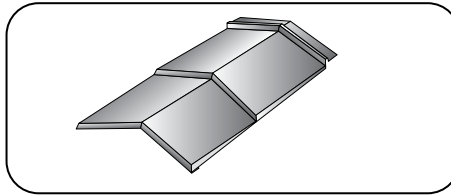

### Cap Shingle (Hip and Ridge) 2-Course


8" x 14" (203 x 356 mm)

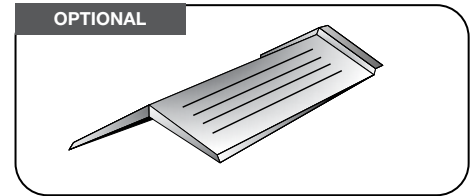

OPTIONAL


### Cap Cottage (Hip and Ridge)

12" x 12" (300 x 300 mm)

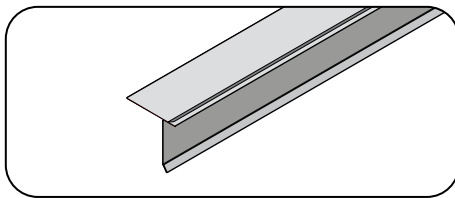


### Starter Strip

Used at the eave.  
2.8125" x 2.25" x 79" (71 x 57 x 2006 mm)

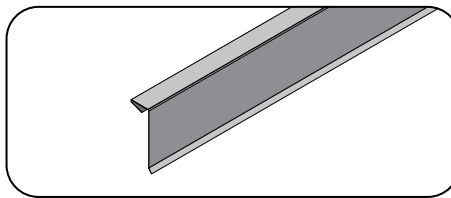


### Rake Cover

Used at rake edges in conjunction with  
Rake/Roof-to-Wall.  
1.5" x 4.25" x 79" (38 x 108 x 2006 mm)

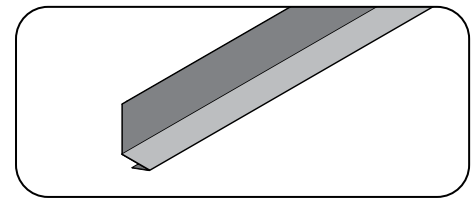


### Z-Bar Attachment

Used at side wall in conjunction with  
Rake Roof-to-Wall.  
1.5" x 2.5" x 79" (38 x 64 x 2006 mm)

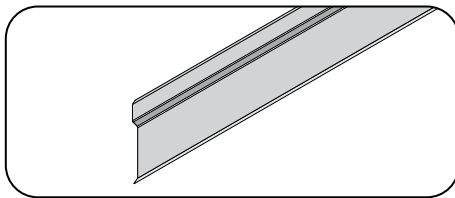


### Z-Bar

Used at headwall and sidewall.  
5" x 79" (127 x 2006 mm), 4.8 lbs (2.18 Kg)

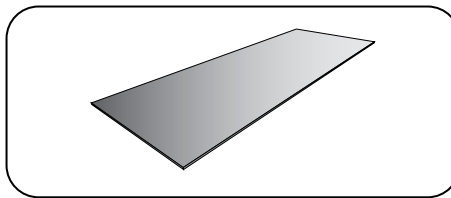


### Flat Sheet

Used at Valley Exits and Chimney/Skylight.  
18" x 54" (457 x 1372 mm) 7.48 lbs (4.39 Kg)

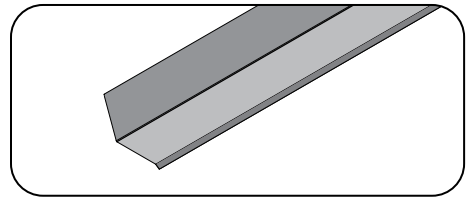


### Head-Side-Wall 110°

Used as counter flashing at head and sidewalls.  
3" x 3.5" x 79" (76 x 89 x 2006 mm)

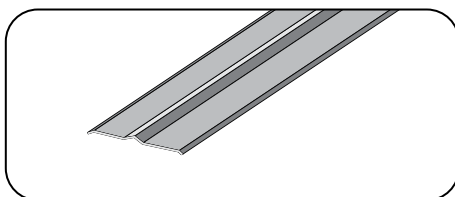


### Valley Center Cover

Used at valley in conjunction with Valley 5 "V"  
and Char-Filter Foam.  
4.5" x 79" (108 x 2006 mm) 4.19 lbs (1.90 Kg)

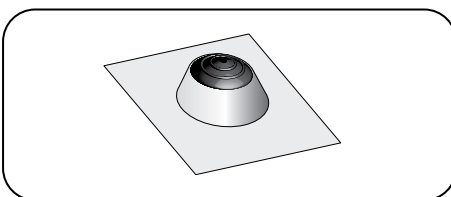

### Pipe-Jack 4-N-1

Base 18" x 18" (457 x 457mm)  
Fits 1.25" to 4" pipes (32-100mm)  
1.86 lbs (0.85Kg)

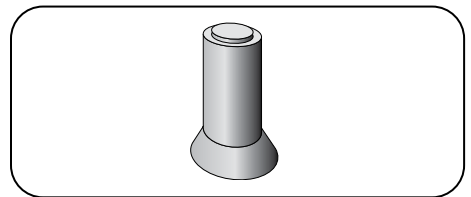


### Pipe Sleeve

3/4" – 4" Dia. Pipes (19 – 100 mm)  
1.72 lbs (0.78 Kg)


# GRANITE-RIDGE Shingle Installation Guidelines

## PAINTED OR BARE ACCESSORIES




### Rake/Roof-To-Wall

Used at rake and sloped sidewall areas.  
0.875" x 3.375" x 120" (22 x 86 x 3048 mm)




### Valley Five 'V'

22" x 120" (559 x 3048 mm), 13 lbs (5.90 Kg)  
Painted Black, Brown or Bare.




### Valley 2-Pc

Requires EmSeal Foam Tape.  
9" x 120" (229 x 3048 mm) 7.35 lbs (3.33 Kg)  
Painted Black inside.




### Pipe Jack Tray

Used as base flashing around pipe-jacks.  
14.5" x 15.5"

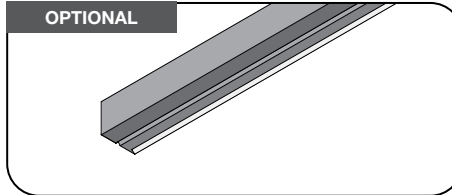

### Side-Wall Under-Pan Metal


Used at sloped sidewall areas.  
4" x 3" x 120" (100 x 76 x 3048 mm)  
5 lbs (2.3 Kg) Painted Brown inside.



### Short Course Cleat


Used to fasten short courses.  
2" x 120" (50 x 3048 mm)

## OTHER ACCESSORIES & ROOF SYSTEM COMPONENTS

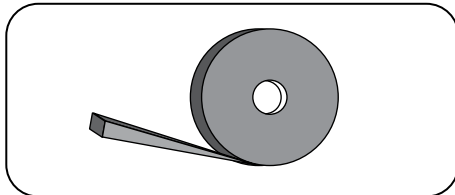


### EmSeal Foam Tape Roll

Used as a universal weather block.  
1" x 0.75" x 19.68' (25 x 19 x 6000 mm)  
1 lb (0.45 Kg)

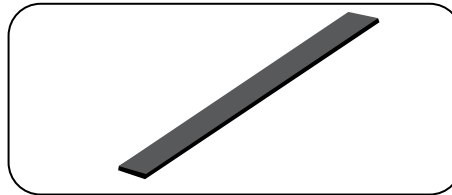


### Char Foam Filter

Used under Valley Center Cover.  
3" x 76" (76 x 1930 mm)




### Barrier Foam Roll

Used under hip and ridge caps.  
1" x 6" x 20' (25 x 150 x 6096 mm)  
3.5 lbs (1.6 Kg)

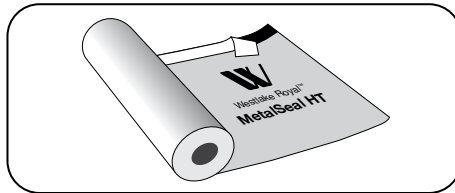


### Westlake Royal™ MetalSeal HT

Ice and water shield, self-adhered,  
high-temperature Underlayment  
36" x 72' (200 sq. ft.) (915 mm x 2.96 M)  
70 lbs/Roll (31.7 Kgs)

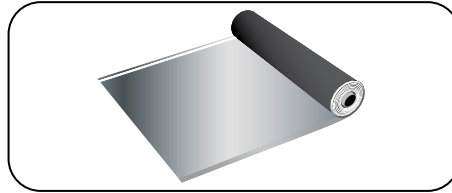

### Sol-R-Skin™ BLUE Fire Resistant, Thermal

Insulating Underlayment  
54" x 100' (450 sq. ft.) (1372 mm x 30.48 M)  
45 lbs/Roll (20.4 Kg)

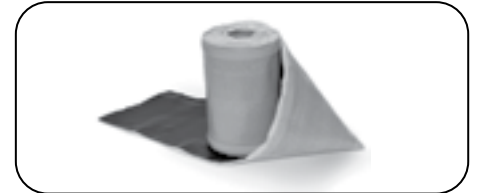

### Wakaflex® Universal Flashing


11" x 33' (290 mm x 10.07 M)  
Black, Brown, Terracotta

# GRANITE-RIDGE Shingle Installation Guidelines

## OTHER ACCESSORIES & ROOF SYSTEM COMPONENTS (cont.)



**Quarrix Rigid Roll®** (Cap Shingle Only)  
Continuous ridge vent  
'0.625" x 7" x 20' (16 x 178 x 6096 mm)



**RidgeMaster® Plus** (Cap Cottage Only)  
Continuous ridge vent  
1" x 11" x 48" (25 x 280 x 1219 mm)



**Touch-up Kit**  
1 Tube of adhesive, 1 Bag of stone chips  
2 lbs (0.9 Kg)



**Bulk Stone Chips**  
1 Bucket of stone chips - 25 lbs (11.3 Kg)

## FASTENERS



**Granite-Ridge Panel Screws** Carbon Steel  
1.5" L x 0.25" HWH (38 mm L x 6 mm) Silver  
OPTIONAL: Carbon Steel or 410 Stainless Steel  
2.0" L x 0.25" HWH (50 mm L x 6 mm)  
2.5" L x 0.25" HWH (63 mm L x 6 mm)  
Available in Black, Red, Brown, Gold, White.



**Valley Screws** Carbon Steel  
Used with 2-Pcs Valley pans.  
(Dome Cap over rubber washer)  
1.5" L x 0.25" HWH (38 mm L x 6 mm)



**Stitch Screws** Carbon Steel  
0.75" L x 0.25" HWH (19 mm L x 6 mm)  
Available in Black, Red, Brown, Gold, White.

## TOOLS




**Cutter**  
39 lbs (17.7 Kg)

Weights are approximate.



**Bender**  
150 lbs (68.1 Kg),  
54" x 43" x 35.25" (1372 x 1092 x 895 mm)





**Cutter Blades ( Top and Bottom)**  
54" x 43" x 35.25" (1372 x 1092 x 895 mm)  
8 lbs/Set (3.63 Kg)



## WALKING ON YOUR ROOF


### PANEL WALKING

Appropriate OSHA approved fall protection must be used when walking on roof panels. Place your feet over the front lip of the panels as shown in left image below. Avoid walking near the panel side-laps as shown in right image below.

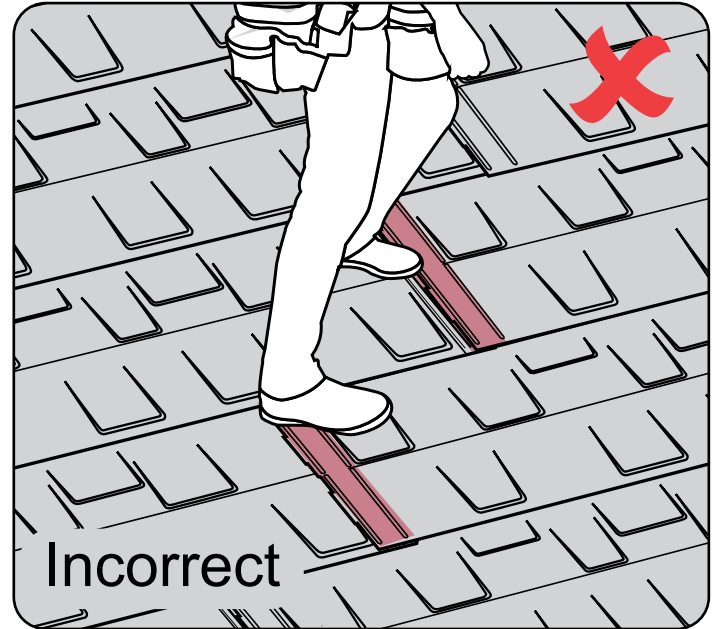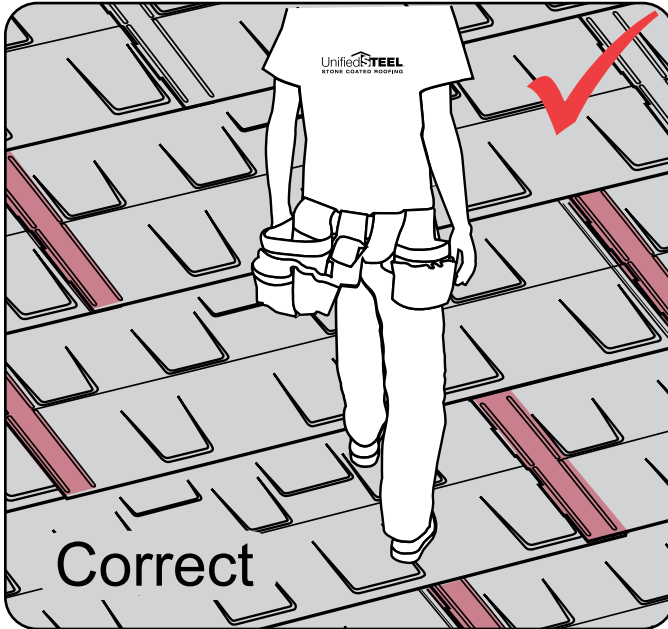


# GRANITE-RIDGE Shingle Installation Guidelines

## UNDERLAYMENT

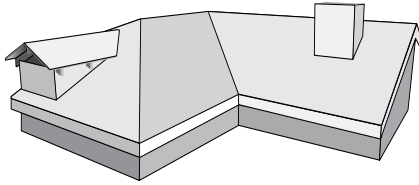

The GRANITE-RIDGE shingle is to be installed on new or existing roofs with a pitch of 3:12 or greater. The installation begins with roof edge metal flashings followed by the installation of roofing underlayment. For GRANITE-RIDGE, the minimum requirement is an ASTM D1970 fully adhered membrane, like Westlake Royal™ MetalSeal HT, covering the entire roof plane, installed per manufacturer's requirements and local building code regulations.


## STARTER STRIP

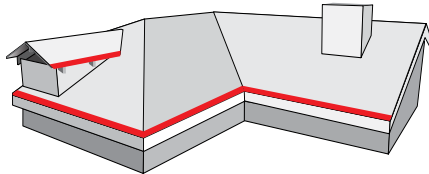


Starter Strip creates a 0.75" (19 mm) overhang at the eave.




*For perimeter flashings including Rake-Roof-to-Wall flashing, refer to local code requirements for correct size.*

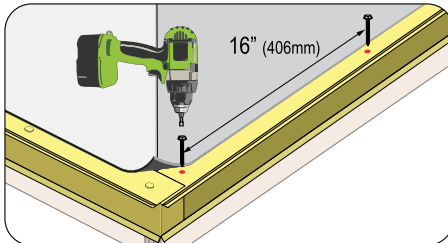

Install the Starter Strip across eave. Fasten the Starter Strip every 16" (406 mm).


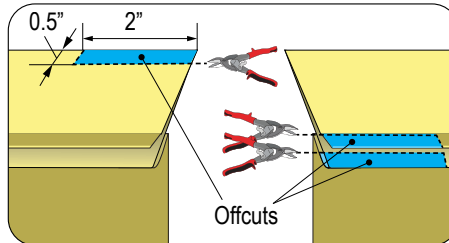


**Overlap Detail:** Cut a 0.5" x 2" (13 mm x 50 mm) notch in the back of the left Starter Strip. Cut both top and bottom front overhang of the right Starter Strip the same size.

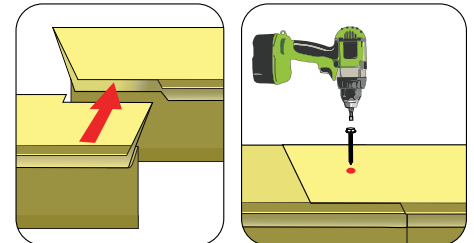


Insert the left Starter Strip into the right, as shown, and fasten.


## RAKE/ROOF-TO-WALL & RAKE COVER

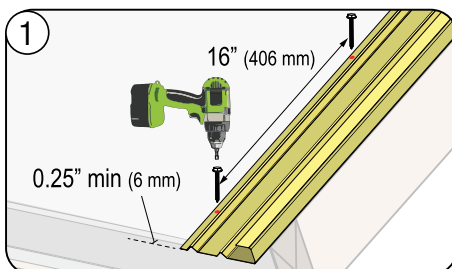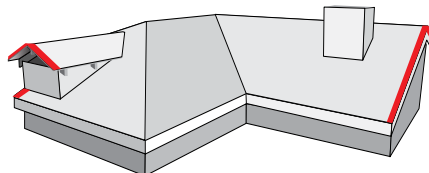


Install Rake/Roof-to-Wall metal with fasteners placed in the outside channel. Extend Rake/Roof-to-Wall 0.25" (6 mm) minimum beyond Starter Strip.

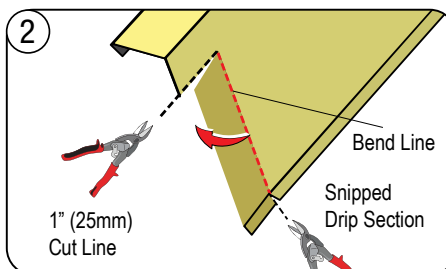

Place Rake Cover on Rake/Roof-to-Wall and mark cut and bend lines.

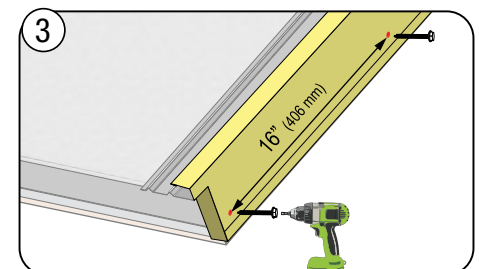



Fit Rake Cover onto Rake/Roof-to-Wall and fasten 16" o.c. (406 mm) into the rake rafter board.

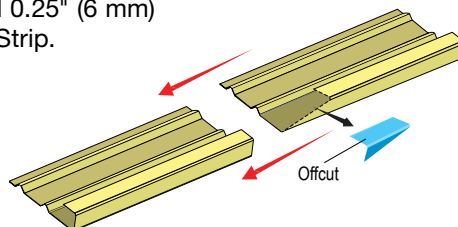


*Lap Rake/Roof-to-Wall 2" (50 mm) minimum to prevent leakage through seams.*

# GRANITE-RIDGE Shingle Installation Guidelines


## VALLEY FIVE 'V' WITH EXIT TRAY

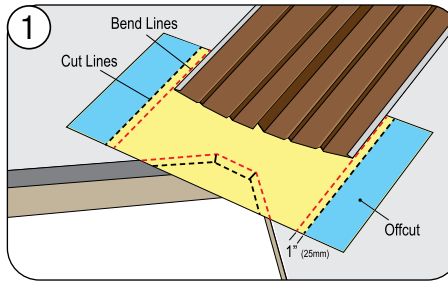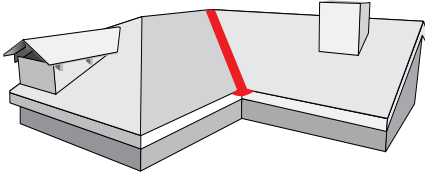


Position Valley Five 'V' at the center of the valley. Place half a Flat Sheet under the Valley. Mark, cut and bend, as shown.

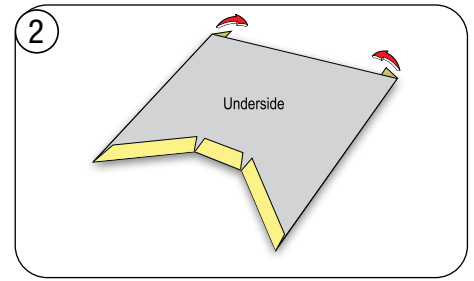


Hem both sides of the folded Flat Sheet to fit around outside edges of valley.

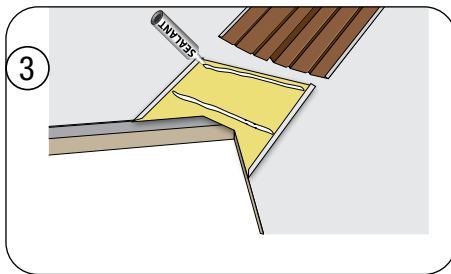

Fit the Exit Tray onto the Starter Strip corner and apply sealant.

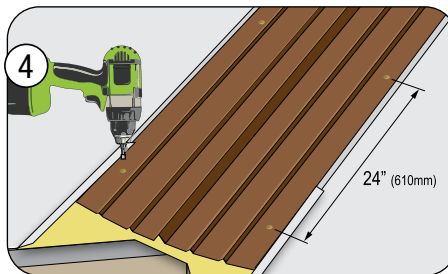


Insert Valley Five 'V' into the Valley Exit. Fasten Valley with washer and grommet screws in the outside locations a minimum of 24" o.c. (610 mm) up both sides.



**When fastening through the valley metal, fasteners must have a rubber washer covered by metal cap to ensure a seal around the fastener location.**

## WAKAFLEX® UNIVERSAL FLASHING

## OPTIONAL

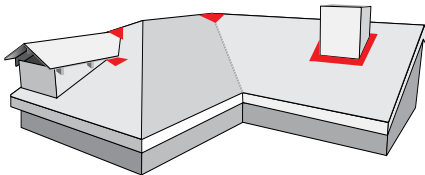

### VALLEY INTERSECTING RIDGES:

Where two valleys meet at the ridge line, Wakaflex® universal flashing can be used to seal the intersecting pieces of valley.

The following necessary steps are provided to prevent water migration under the roof tile.

1. Cut Wakaflex® of equal width to form on top of the 2 pieces of valley metal extended minimum 6" on both sides.
2. Remove the protective film exposing the butyl strip and form on top both sides of valley metal.
3. Ensure that the top upper side of the Wakaflex® is integrated into underlayment installed to prevent moisture from penetrating roof deck.




### Wakaflex® can also be used for:

- Sidewalls
- Splayed Gables
- Hip and Ridge Junctions
- Solar Panels
- Chimneys
- Tricky details that require weather protection
- Variety of repair applications



## VALLEY 2-PC CLOSED WITH EXIT TRAY

## OPTIONAL

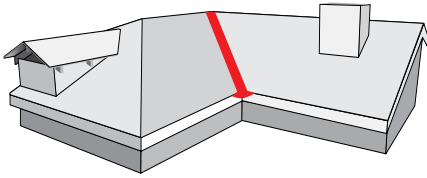


Unified Steel™ Valley 2-Pc uses two (2) pieces per each 10 foot (3048 mm) length of valley.


### Estimating formula:

Lin-ft of Valley divided by 9.75 x 2 = # of Valley 2-Pc required.


An Exit Tray helps provide a finished appearance to the exit area of the valley especially if the valley is exiting onto another roof section such as from a Dormer roof.

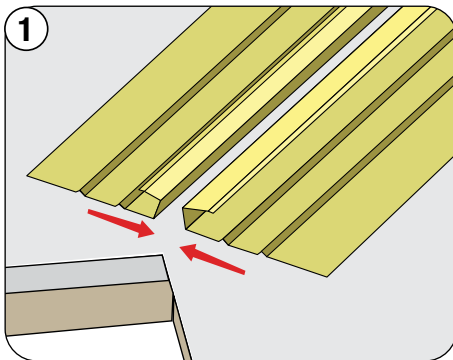


Position Valley 2-Pc at the center of the valley.

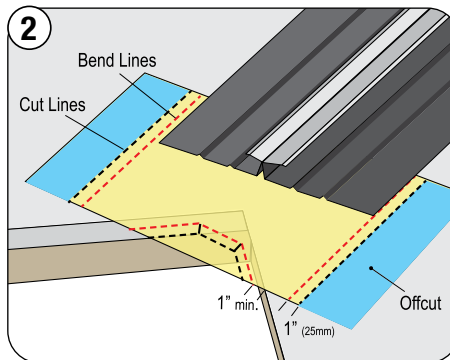


Place half a Flat Sheet under the Valley. Extend Flat Sheet a minimum of 1" (25 mm) past eave. Mark, cut and bend, as shown.

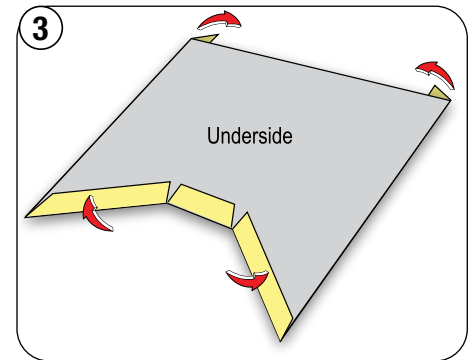


Hem both sides of the folded Flat Sheet to fit around outside edges of valley.

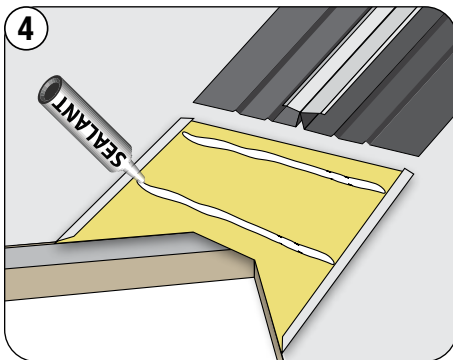

Fit the Exit Tray at the eave. Apply sealant, as shown.

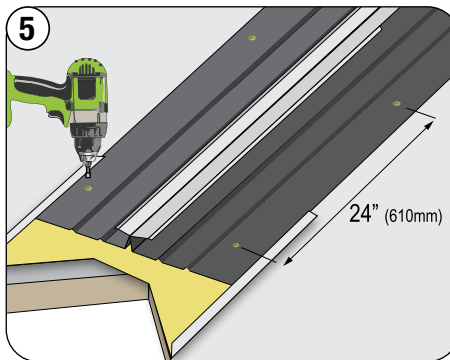

Insert Valley 2-Pc into the Exit Tray. Fasten with washer and grommet screws in the outside locations a minimum of 24" o/c (610 mm) up both sides.

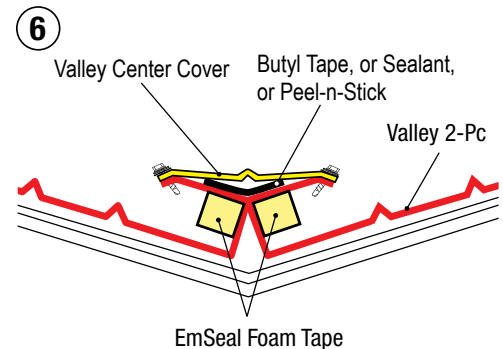

Install a strip of EmSeal tape down each valley section on the inside vertical leg.





Unified Steel™ Valley 2-Pc requires Butyl Tape, or Sealant, or Peel-n-Stick down valley center, then Valley Center Cover screwed down with Stitch screws. [See Page 14 for details.](#)



# GRANITE-RIDGE Shingle Installation Guidelines


## PANEL LAYOUT AND FASTENING

GRANITE-RIDGE Shingle panels have a 2.0625" (52 mm) side-lap and must be staggered greater than 9" (229 mm). The panels incorporate a "Pittsburgh" interlock across the Fastening Flange of each panel that allows the nose of the panel above to fit into it and form a concealed fastened design. The panels are installed batten-less (Direct-to-deck) and CANNOT be straight laid.

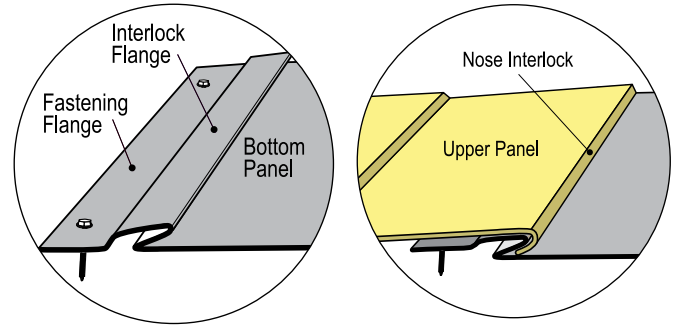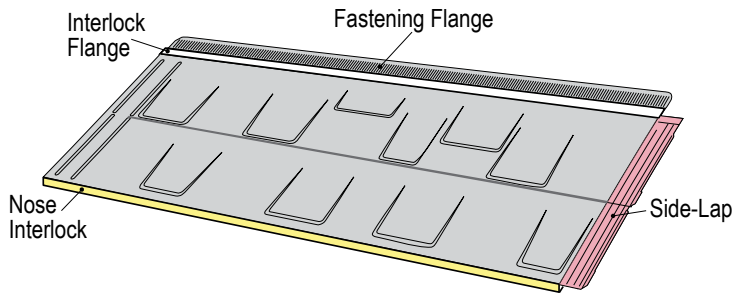


### CONCEALED FASTENED DESIGN

It is critical the Nose Interlock of the panel above locks into the Fastening Flange of the panel below creating a tight fit.

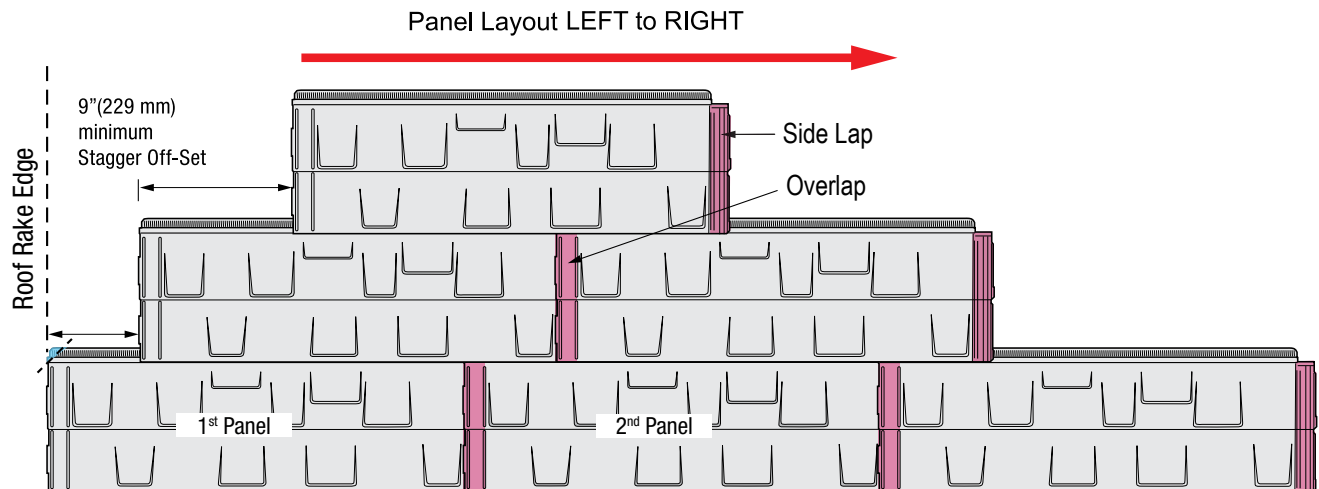


GRANITE-RIDGE Shingle panels must be randomly staggered greater than 9" (229 mm) minimum to prevent pattering on the roof and CANNOT be straight laid.

GRANITE-RIDGE Shingle panels can only be laid LEFT to RIGHT

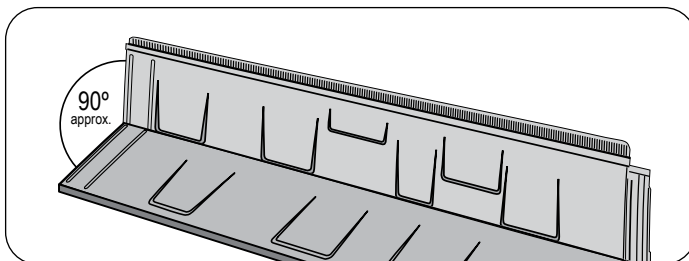


When installing any panel except the first one of each course, it is VERY important to **bend the shingle** at the horizontal step feature to approximately 90 degrees. This is to insure a better fitting joint and to prevent "fish-mouthing" of the side lip.

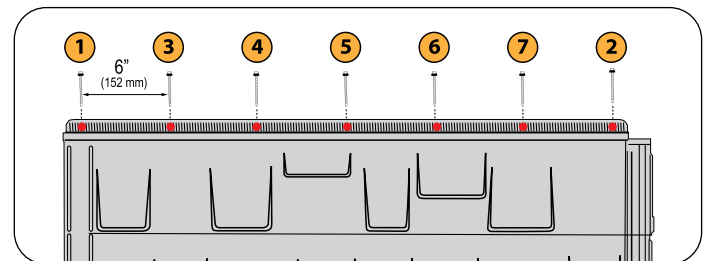

Fasten the panel using seven (7) fasteners into the fastener strip, 6" (152 mm) apart. Fasteners must penetrate the roof decking a minimum of 0.75" (19 mm).


## RAKE PANEL SECTIONS

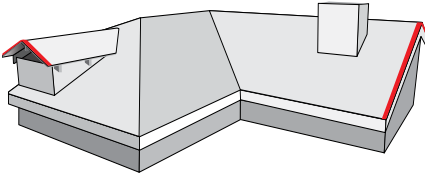


### **Each Panel that is inserted into Rake/Roof-to-Wall:**

Cut the top corner ("dog-ear") of the panel in 45-degree angle. After cutting the "dog-ear" make sure the back hem is open and will allow the panel above to fit tight.

### LEFT SIDE RAKE PANELS

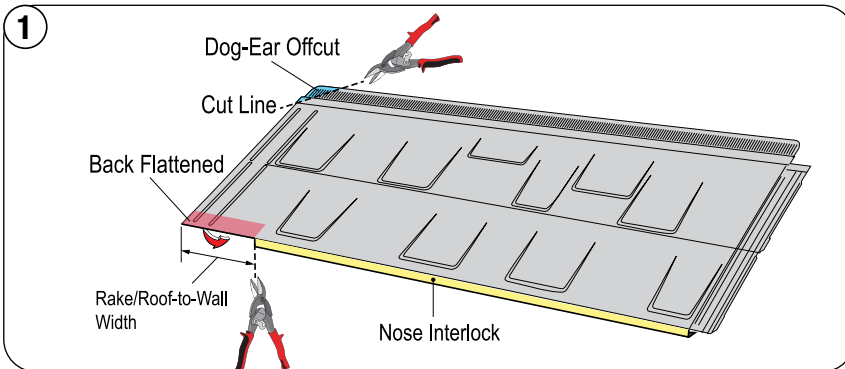


**First course panel Only:** Cut the panel's Nose Interlock and flatten the nose section the width of the Rake/Roof-to-Wall, to allow drainage of the rake detail.

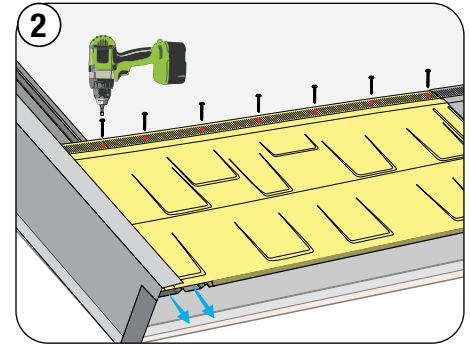


Insert first course panel into Rake/Roof-to-Wall and interlock with the Starter Strip. Fasten panel and continue installation across the roof.


### RIGHT SIDE RAKE PANELS

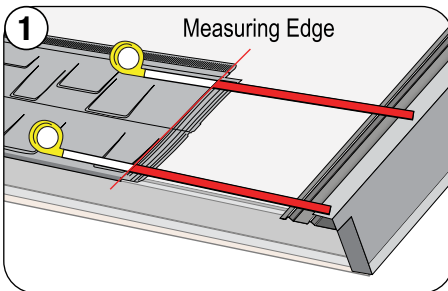


Measure Rake panel cut from the panel overlap to the edge of the Roof/Rake-to-Wall.

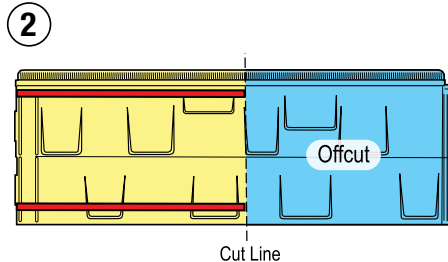


Apply measurements to the full panel, mark and cut.

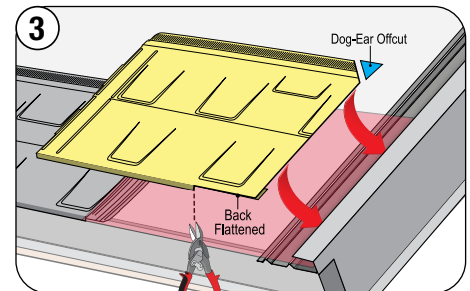

Cut the panel's nose interlock and back-flatten the nose section the width of the Rake/Roof-to-Wall. Insert rake panel cut into Rake/Roof-to-Wall and interlock with the Starter Strip.

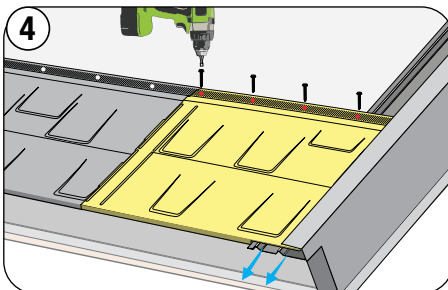

Fasten rake panel cuts, as shown.

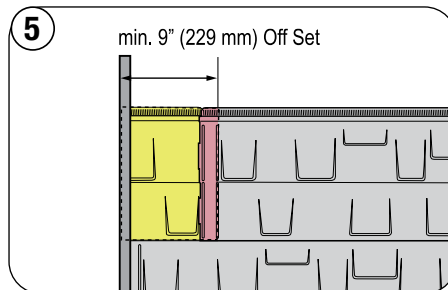

Subsequent courses of panels hook onto the rear of the panel beneath.


A stagger pattern can be created by using the offcut from the previous row to begin the next row.




When installing any panel except the first one of each course, it is **VERY** important to **bend the shingle** at the horizontal step feature to approximately 90 degrees. This is to insure a better fitting joint and to prevent "fish-mouthing" of the side lap.

## HIP PANEL SECTIONS - BARRIER FOAM METHOD


▶ See page 23 for Barrier Foam installation

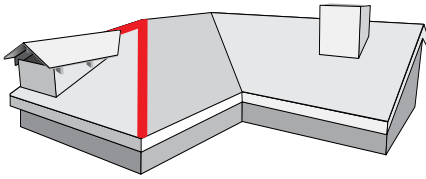


### LEFT SIDE HIP PANELS




Measure hip panels from the panel's side lap to the hip center line, as shown.

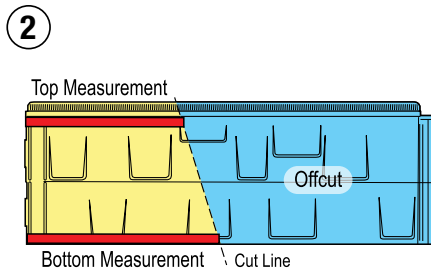

Apply measurements to the full panel, mark and cut.




Fit panels to the hip center line and fasten.




Continue hip panels installation.


### RIGHT SIDE HIP PANELS

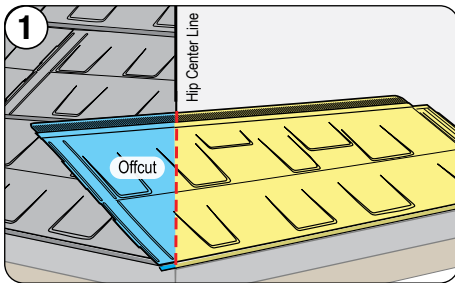

Place full panel aligning with the eave, mark the center line on the panel and cut.

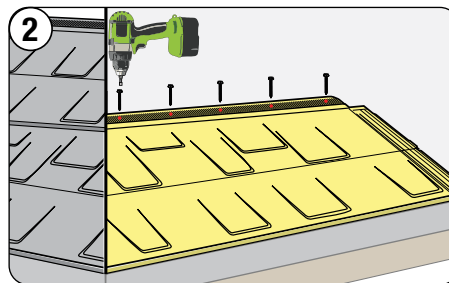

Fit panels to the hip center line and fasten.

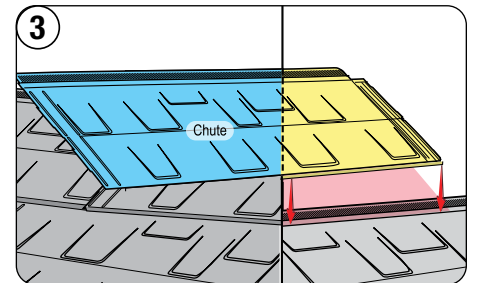


Complete first row before starting second row hip section. Continue hip panels installation.


## HIP PANEL SECTIONS - OVERLAP METHOD

## OPTIONAL

The overlap method requires a 2" (50 mm) lap on **only one side** of the hip. One panel is cut along the hip center line, the other panel uses an overlap.

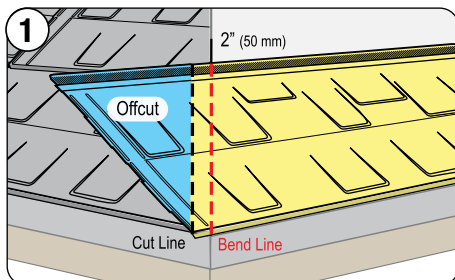


Position full panel, aligning with the eave. Mark the hip center line on the panel as bend line. Add 2" (50 mm) and mark as cut line.

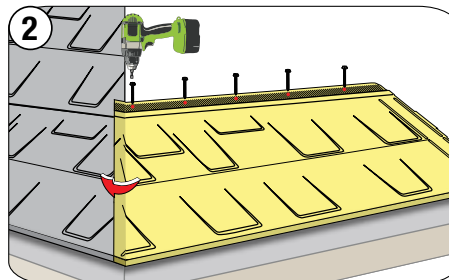


Cut, bend and install hip panel, as shown.

# GRANITE-RIDGE Shingle Installation Guidelines


## VALLEY PANEL SECTIONS WITH VALLEY FIVE 'V'

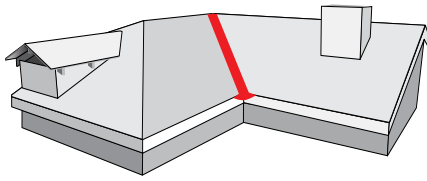


### LEFT SIDE VALLEY PANELS

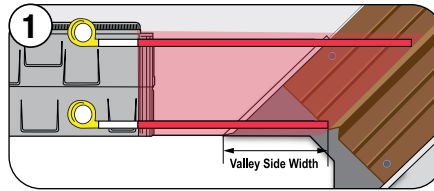


Measure from the side-lap reference point to the center rib of the Valley Five "V".

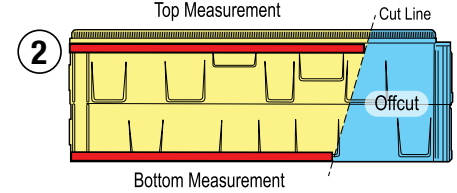


Apply Measurements to the full panel and cut.

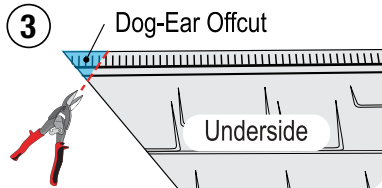

**Each valley panel:** Cut the top corner ("dog-ear") of the panel in 45-degree angle, as shown. This helps deflect water into the valley drainage channels. Make sure the back hem is open and will allow the panel above to fit tight.

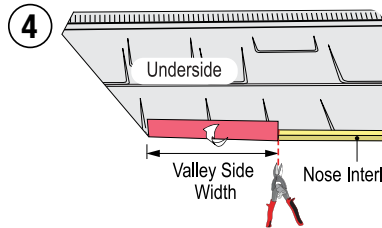

**First valley panel row only:** Cut and notch the nose interlock the width of the side of the Valley Five "V", to allow free water flow to exit the valley.

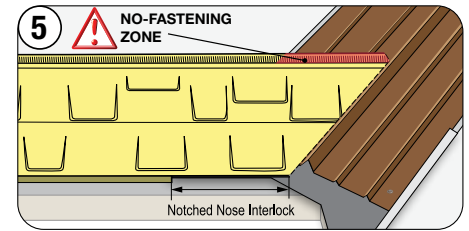


Install first row valley panel onto the Valley Five "V" and fasten, keeping away from the no-fastening zone.




*Complete first row across the roof before starting second row valley section.*

### RIGHT SIDE VALLEY PANELS

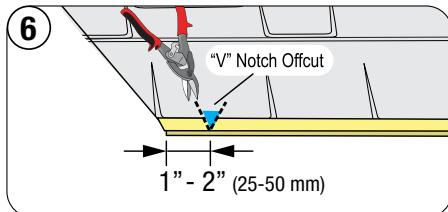


**Second and following valley panel rows:** At the nose interlock on the underside of the panel cut the V-notch approx. 1"-2" (25-50 mm) from the edge of the valley cut. This prevents water migration under the panel and across the roof.

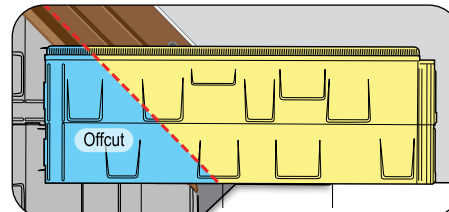

Place full panel aligning with the eave, mark the line along the center rib of the Valley Five "V" and cut.


**Repeat Step 3-4** for the right side valley panels.

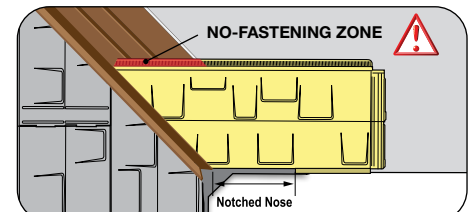

Install right side valley panel onto the Valley Five "V" and fasten, keeping away from the no-fastening zone.


**Repeat Step 6** for the second and following valley panel rows.

## VALLEY CENTER COVER INSTALLATION

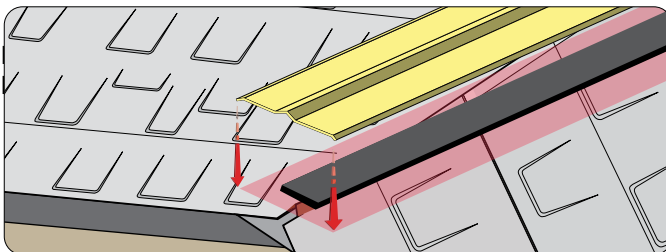

After all valley cut sections are installed, place Char Foam Filter (debris guard) along the center of the Valley Five "V". Install Valley Center Cover.

Lap Valley Center Cover a minimum of 2" (50 mm).

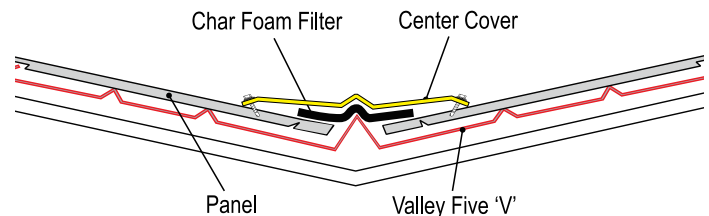


Valley Center Cover is fastened with corrosion resistant stitch screws to each course of panels.



**Do not penetrate the Valley Metal,** use Stitch screws to secure the Valley Center Cover.




## DORMER VALLEY EXIT - FLAT SHEET METHOD

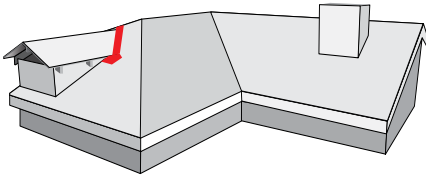


This is a critical roof area and requires special attention to ensure good weather protection. When the main roof intersects with a dormer roof, the panel's back-lip, where the valley exits onto the main roof, must be flattened and the panels bent-up against the dormer roof (see steps below).


Use either Unified Steel™ stone coated Flat Sheet or Wakaflex® universal flashing to create a valley exit piece.

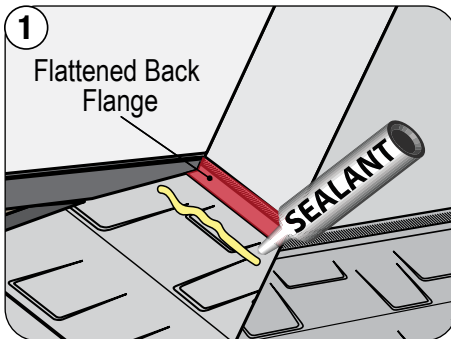


Flatten back flange against the roof deck. Apply sealant.

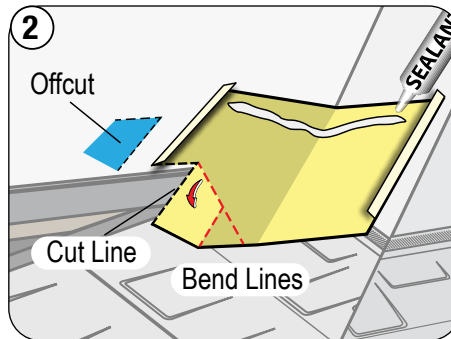


Form the stone coated Flat Sheet as an extension and exit tray with hemmed edges, as shown. Apply a bead of sealant.

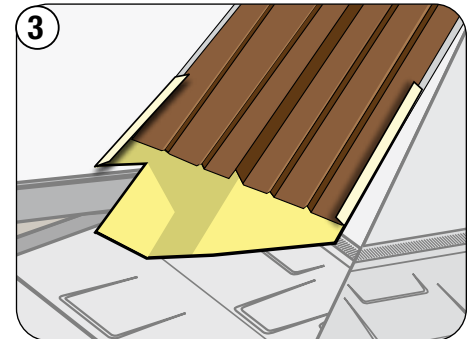

Fit Valley metal over and onto the formed exit tray and embed the Valley into the sealant.

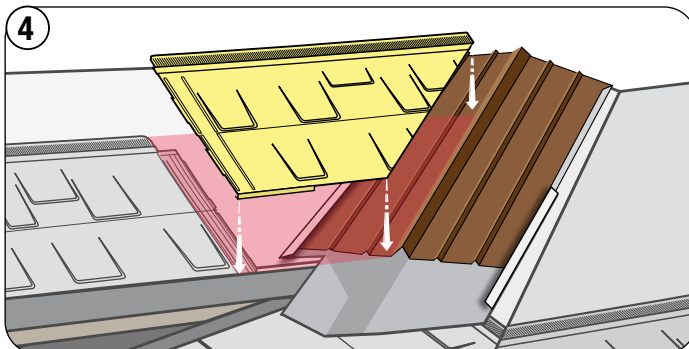

Install valley panel cut onto the Valley. Note that the nose interlock hook of the panel must be notched to allow drainage of the valley. [See page 13, Step 3 for details.](#)

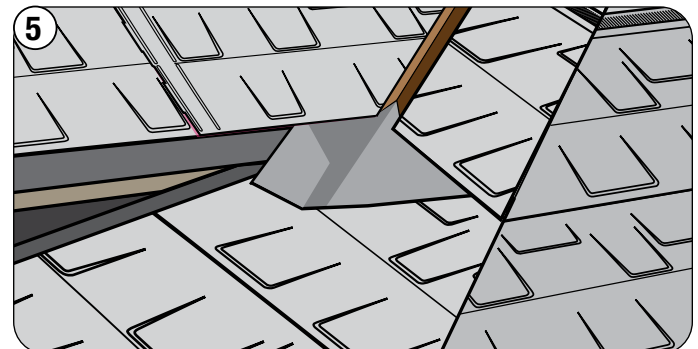

Complete Dormer Valley Exit.


## DORMER VALLEY EXIT - WAKAFLEX® FLASHING

## OPTIONAL

Where a standard metal valley flashing transitions onto an adjoining roof plane, a Wakaflex® flexible extension may be used to make certain that moisture flows from the valley and onto the courses of roof tiles below. The following steps are provided to prevent water migration under the roof panels.


1. Cut Wakaflex® 2" (50 mm) wider than the valley metal.
2. Peel off protective film and fit the Wakaflex® cut piece under the valley exit.
3. Form the Wakaflex® to the contours of the panels below, ensuring a complete bond of the butyl strip onto the stone coated surface.
4. Wakaflex® should be painted or stone coated to match the panel color.

## PIPE FLASHING - SANDWICH METHOD

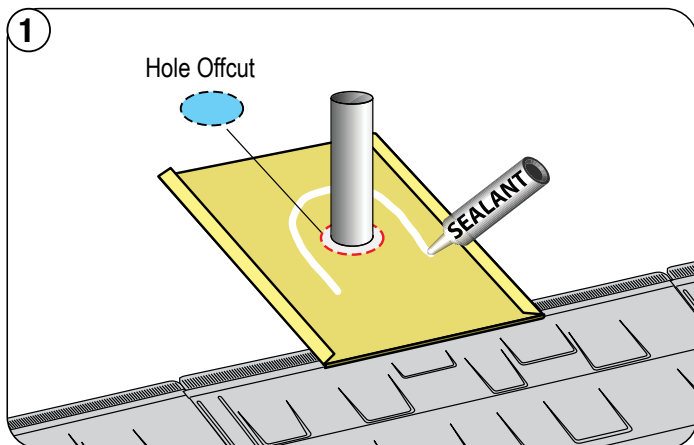


Cut a hole in the Pipe-Jack Tray to fit over the pipe and interlock into the back flange of the panel below.

Apply a bead of sealant in an upside "U" shape to allow for drainage.

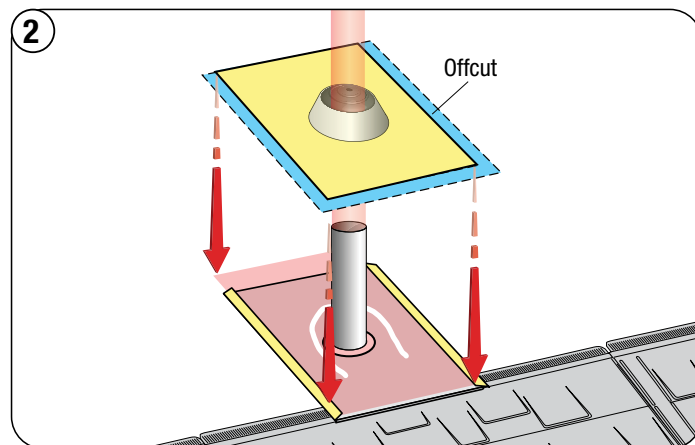


Trim the Pipe-Jack flashing as needed to fit between the hemmed sides of the Pipe-Jack Tray.

Install new Unified Steel™ 4-N-1 Pipe-Jacks designed to fit pipes from 1.25" to 4" (32-100mm) in diameter onto the pipe.

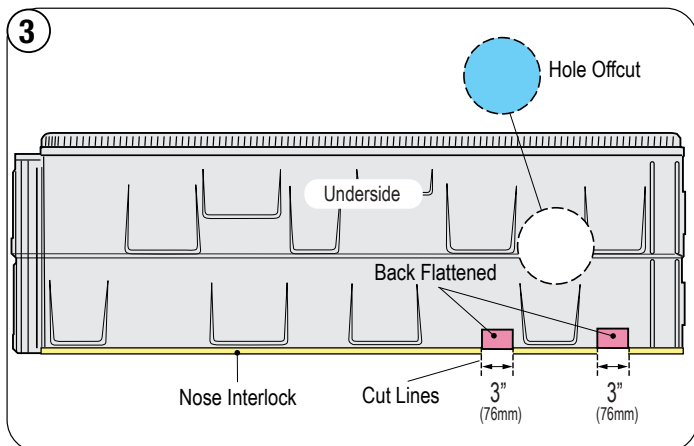


Cut a hole in the cover panel tight to the Pipe-Jack cone.

Cut and fold the nose interlock approximately 3" (76 mm) on either side of the pipe hole to allow for drainage.

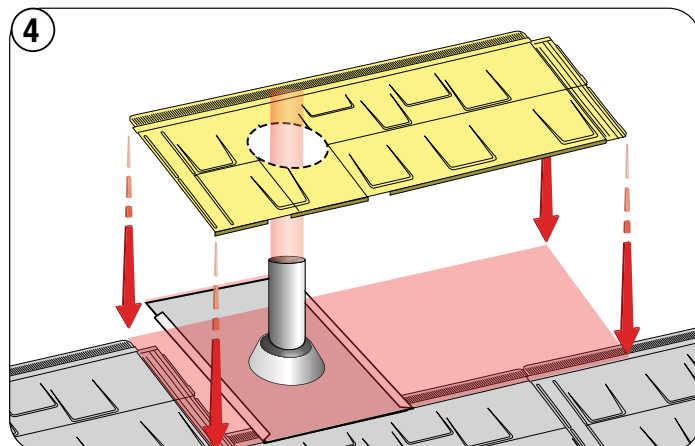

Install the cover panel, ensuring the nose interlock and side lap are fully engaged.

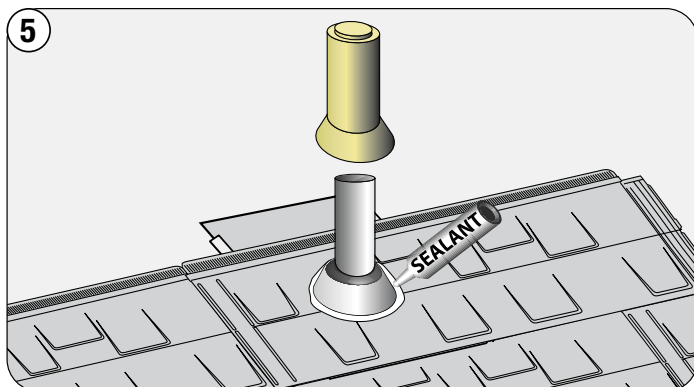


Apply sealant and stone chips using Unified Steel™ Touch-Up Kit as needed. Install a Pipe Sleeve to finish the detail.


### SOLAR SYSTEM FLASHING MOUNT:

As round pipe is often used to support solar systems, the details above can be used to flash the supporting solar members.


## CHIMNEY / SKYLIGHT DETAIL

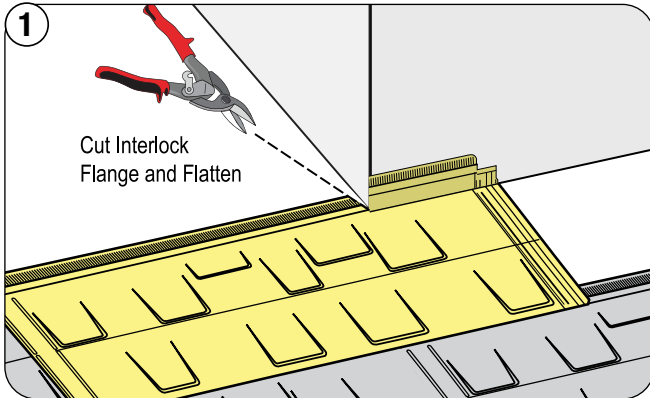


Measure, cut and fold up panel 2" (50 mm) minimum.

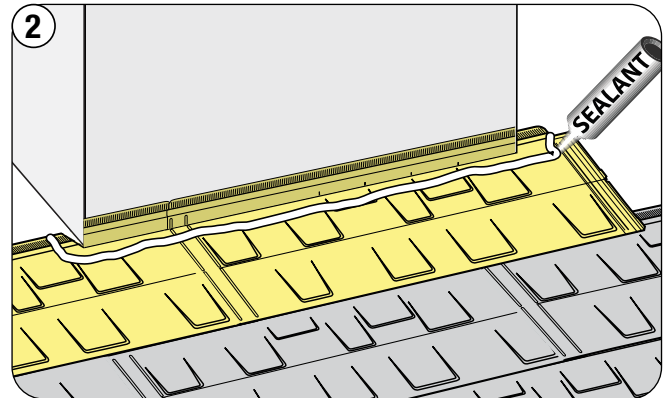


Complete this step across the front of the headwall. Apply a bead of sealant across the panel.

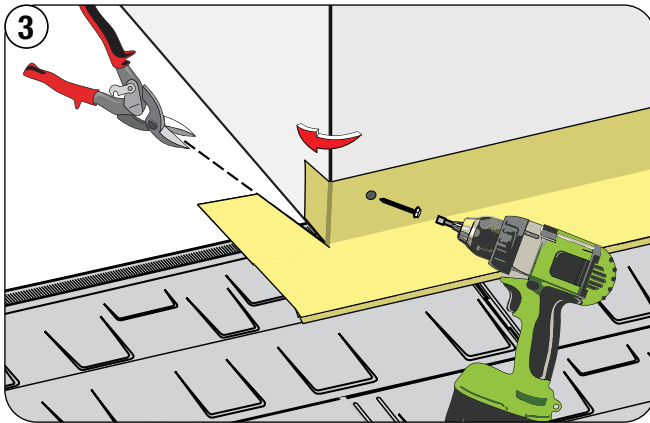

Measure, cut and fold up Head-Side-Wall flashing. Install and fasten, as shown, on both sides.

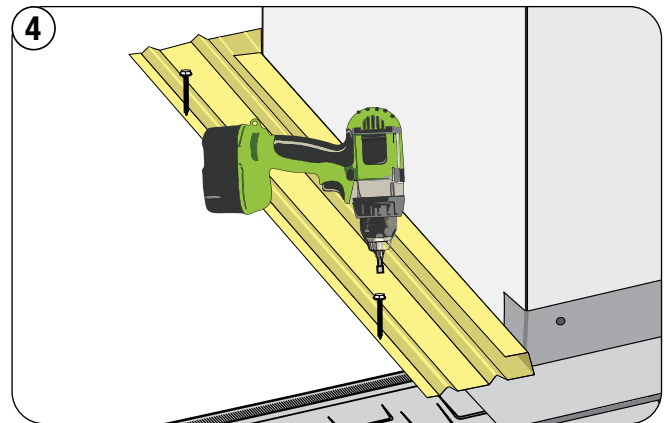

Measure, cut, fit and fasten Rake/Roof-to-Wall flashing.

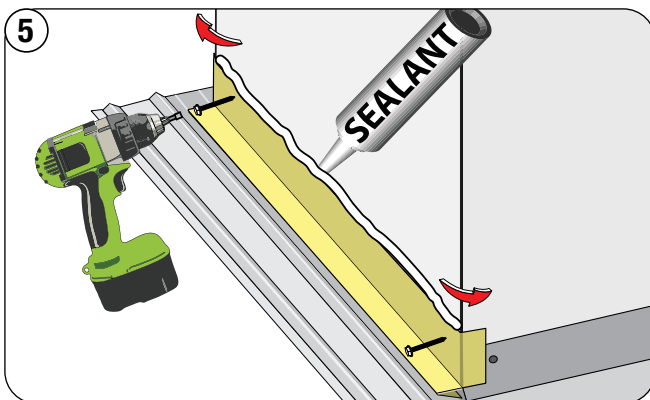


Fasten Z-Bar Attachment at 16" (406 mm) o.c. as shown. Apply a bead of sealant along top of Z-Bar Attachment & wall or Chimney/Skylight.



*On sloped side-wall areas lap Rake/Roof-to-Wall metal a minimum of 2" (50 mm).*


*We recommend in mountainous regions, with heavy snow loads and roof pitches below 6:12, apply a bead of sealant across each Rake/Roof-to-Wall lap joint.*

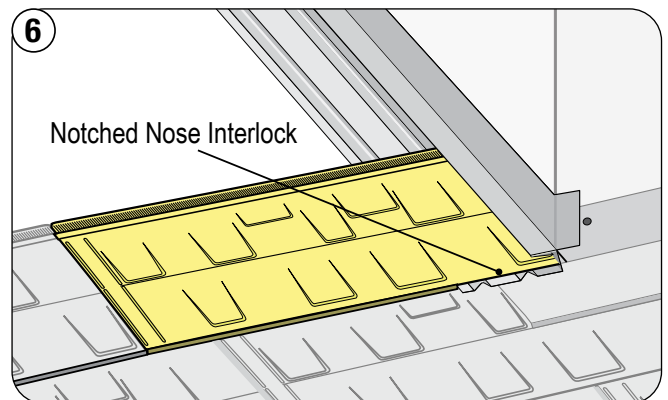


Fit the next course panel up from the bottom of the headwall and insert it into the Rake/Roof-to-Wall flashing. Note that the nose interlock of the panel must be notched to the width of the Rake/Roof-to-Wall.

Continue this detail on both sides of the item being flashed.


## CHIMNEY / SKYLIGHT DETAIL (cont.)

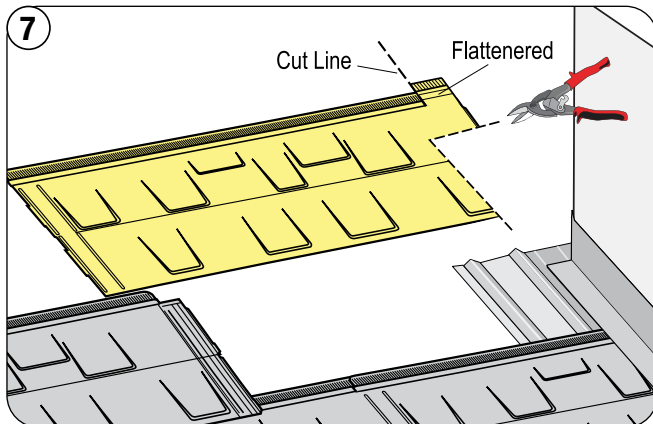


Measure and cut the top left and right panel on either side of the item being flashed.

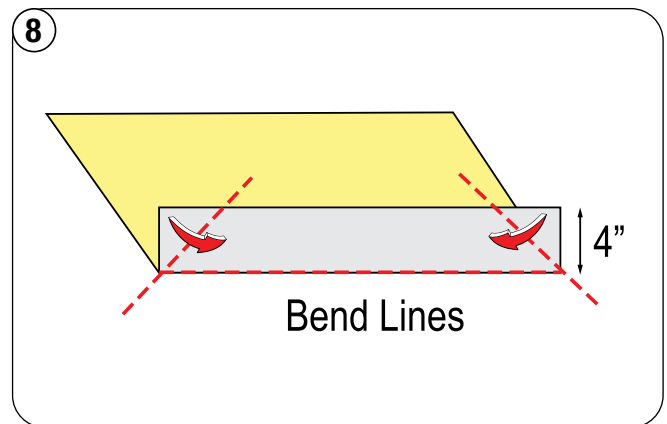


Using a section of Flat Sheet, mark and bend it up 4" (100 mm) minimum forming a saddle flashing as shown for the back of the item being flashed.

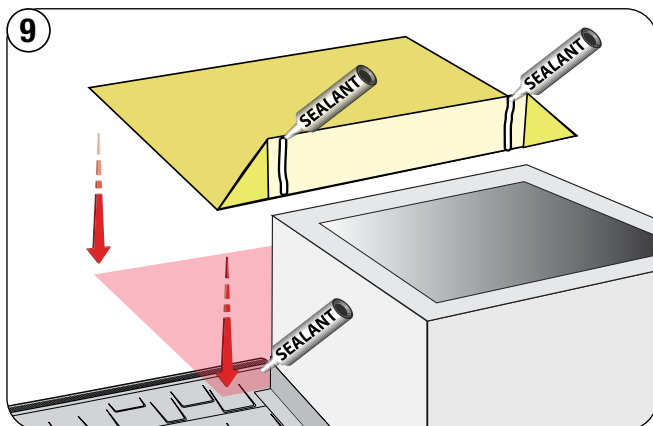


Bend 4"x 4" triangle over to finish the saddle. Apply sealant along panel and set saddle onto the sealant.

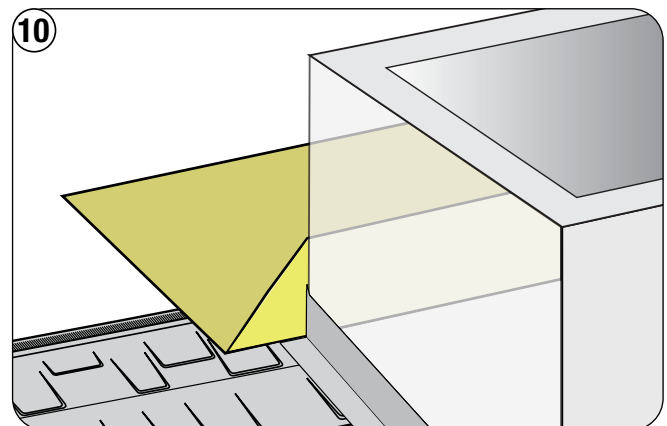

The saddle fits down onto the previously installed top panel sections and the corners ensure drainage away from the top corners.

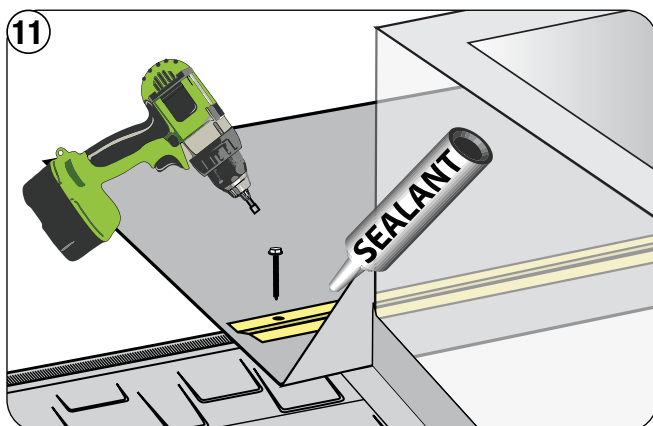


Cut and fit a section of Short Course Cleat across the back of the saddle, aligned with the fastening flange of the panels on either side of the item being flashed. Embed the Short Course Cleat in a bead of sealant. Fasten the Short Course Cleat every 6" (152 mm).

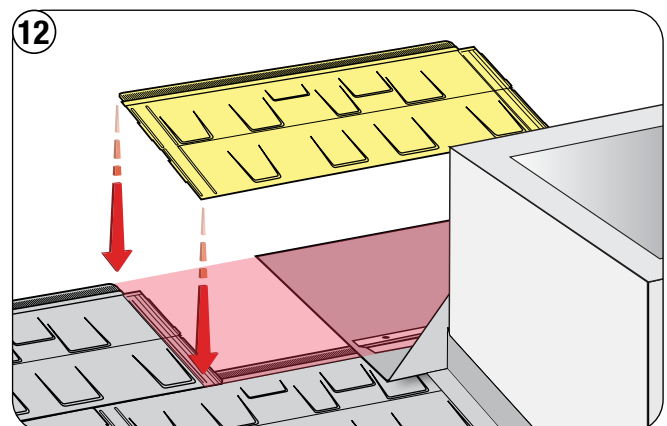


Install a full panel, lapped and interlocked correctly, to the adjacent panels and interlocked with the Short Course Cleat.




## SHORT COURSE DETAIL

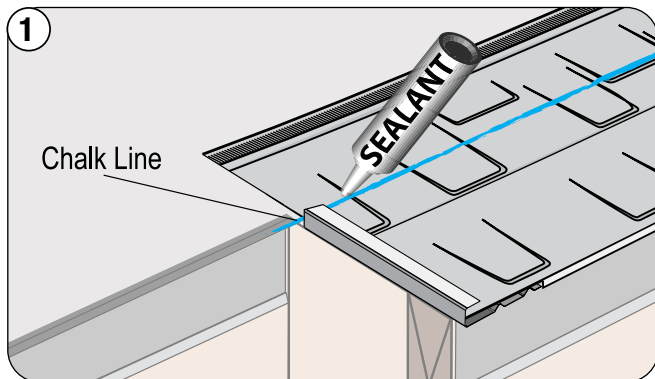


Short Course panels shall be applied to the lowest eave. Mark a line onto the short course panels, aligning with the longest section of Starter Strip. Apply a bead of sealant across the chalk line.

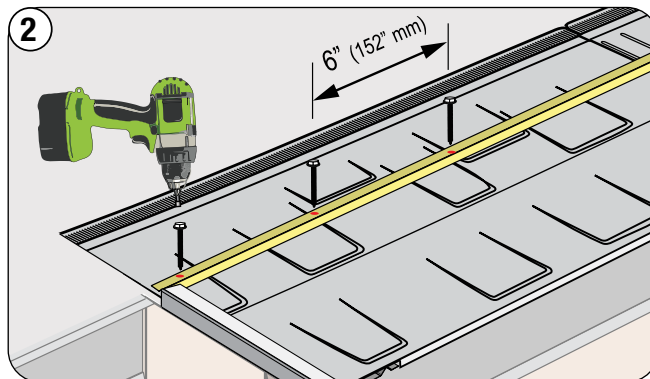

Set Short Course Cleat in sealant and fasten every 6" (152 mm).

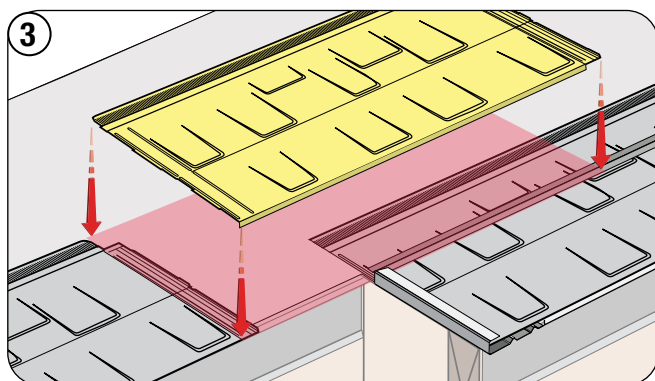

Fit the full panel from the longer roof section and ensure its interlocked into the Short Course Cleat.


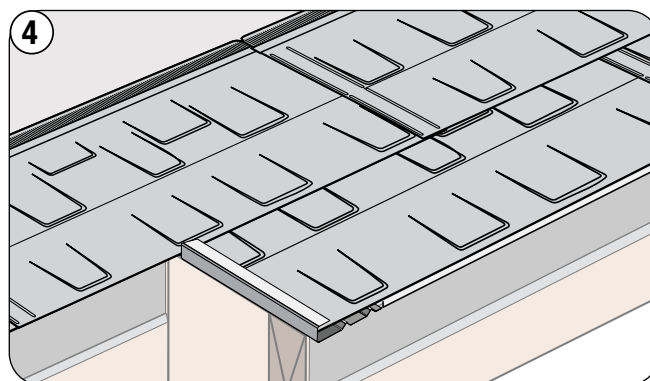


The completed Short Course detail should look almost seamless from the rest of the field.


# GRANITE-RIDGE Shingle Installation Guidelines

## RIDGE CUT SECTIONS - BARRIER FOAM METHOD


▶ See page 23 for Barrier Foam installation

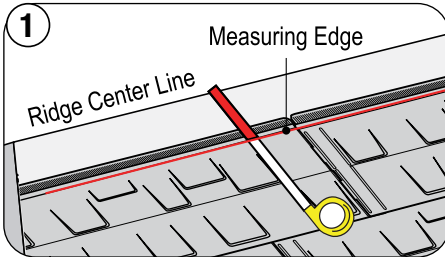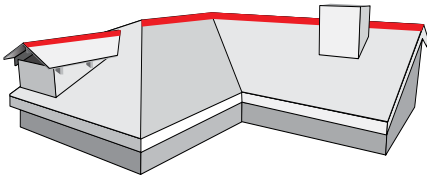

Measure ridge panels, as shown.

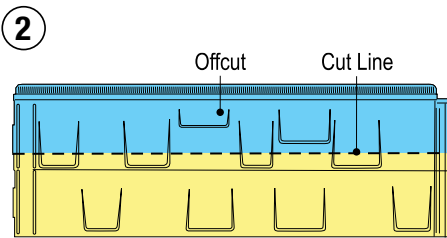

Apply measurements to the full panel and cut.

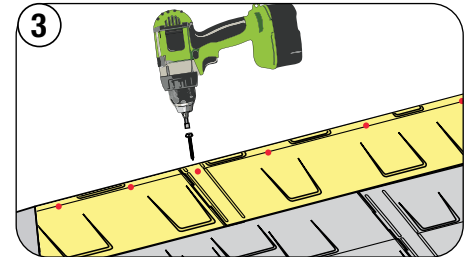


Install panels across ridge. Secure each end and the center of the ridge panel with fasteners.


## RIDGE CUT SECTIONS - OVERLAP METHOD

OPTIONAL

The overlap method requires a 2" (50 mm) lap on **only one side** of the ridge. One panel is cut along the ridge center line, the other panel uses an overlap.

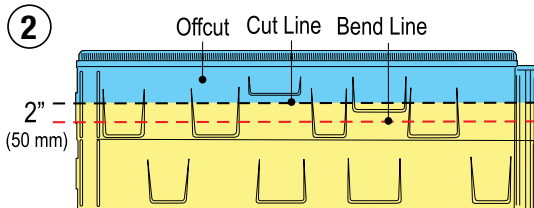


**Measure ridge panels, as shown in Step 1.** Apply measurements to the full panel and mark as Bend Line. Add 2" (50 mm) and mark as Cut Line. Cut and bend the ridge cut panel.

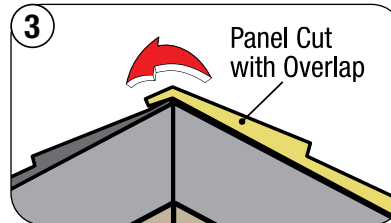


Install ridge panels overlapping, as shown.


## RIDGE CUT SECTIONS - IF INSTALLING CONTINUOUS RIDGE VENT

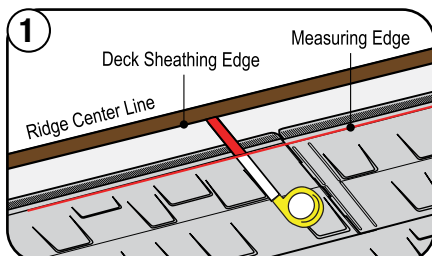

Measure ridge panels from the interlock flange to the edge of the roof deck.

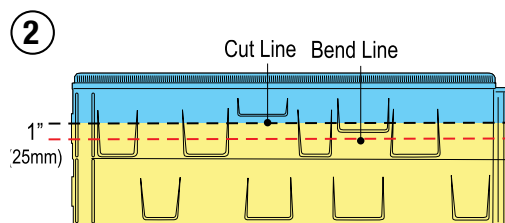

Apply the measurements and mark the Bend Line. Add 1" (25 mm) for the Cut Line.


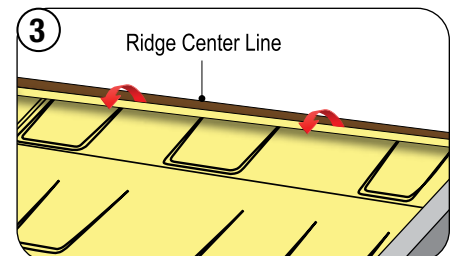


Create the Hem across each ridge panel. Install ridge panels, as shown.




See Pages 23-24 for Continuous Ridge Vent Details.


## HIP STARTER DETAIL

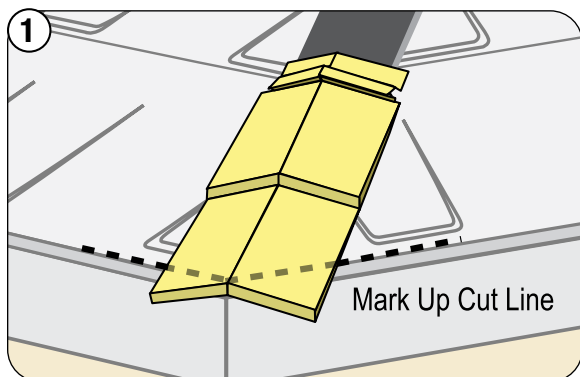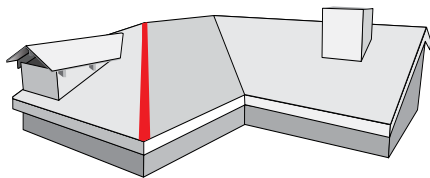


Position full Shingle cap on the roof so the hip center line is covered by the nose of the cap. Mark the panel line on the underside of the cap.

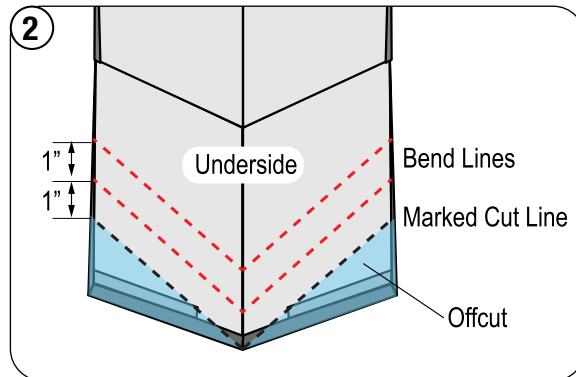

From the scribed panel line, add two more lines 1" (25 mm) apart so the cap now has three lines marked on the underside.

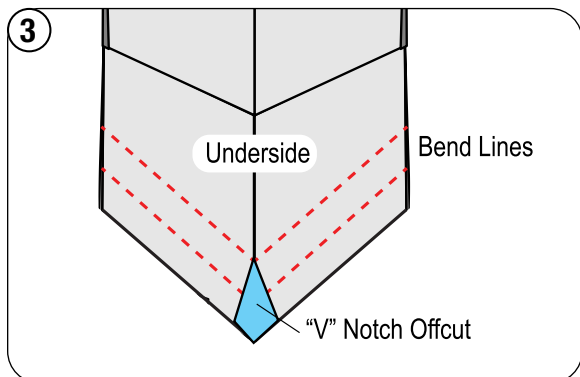


Cut a 'V' notch out of the cap. Using hand seamers, bend the cap to create a 3-D nose section that will hook onto the front edge of the shingle around the hip corner.

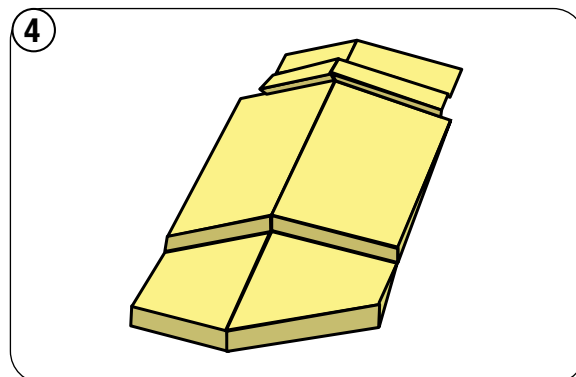


The finished Hip Cap Starter piece will have a 3-D look and a nose that is approximately 1" (25 mm).

# GRANITE-RIDGE Shingle Installation Guidelines


## HIP TRIM CAPS & HIP/RIDGE INTERSECTION - BARRIER FOAM METHOD (Cap Shingle Shown)

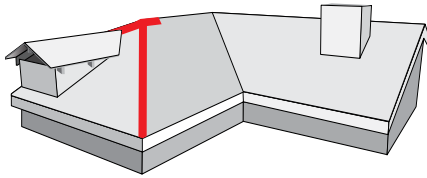


Barrier Foam roll is designed for use on both the hip and ridge to provide a weather barrier between the panel and the trim caps being used.

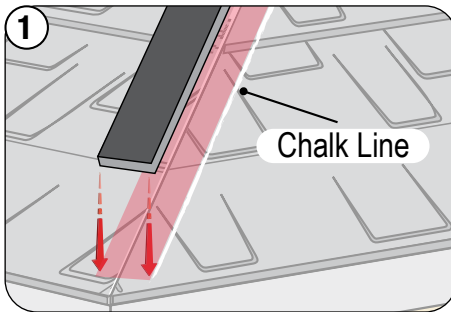


1 Install a strip of Barrier Foam or approved weather block over the center line of the hip. Use a chalk line to create a straight edge to align Barrier Foam and caps.

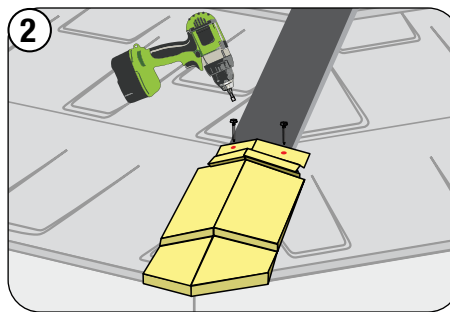


2 Install the Hip Starter Cap previously formed, interlocked over the nose of the panels, at the hip corner. Fasten through cap and Barrier Foam into the roof decking.

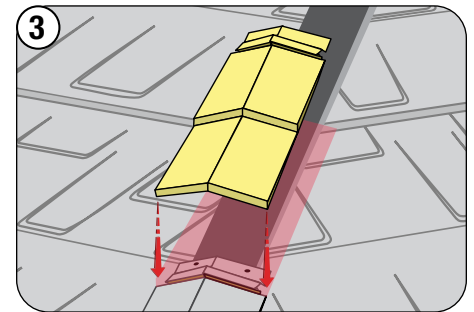


3 Fit each cap similar to panels, making sure the nose interlock is secure. Fasten each cap using two screws.

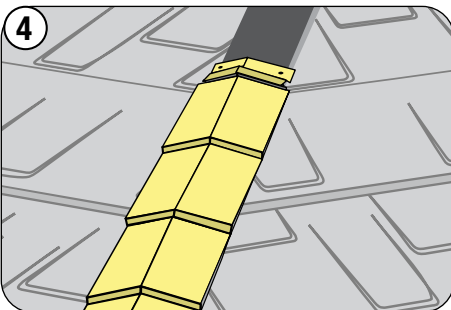


4 Continue this procedure with each cap up the hip to the ridge intersection.

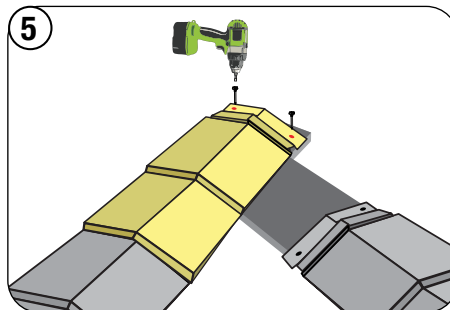


5 At the ridge intersection, where two hips meet, install final hip cap and fasten.

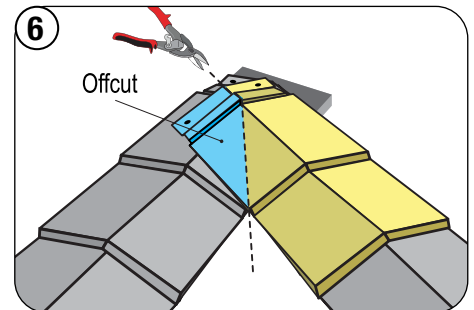


6 Overlap hip caps. Mark and cut top hip cap along the center line to create a clean finish.

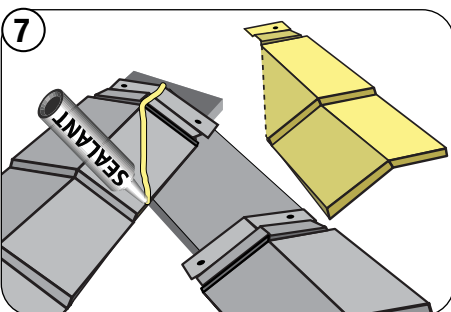

7 Apply a bead of Sealant along the center line before installing trimmed top cap to insure weather block.

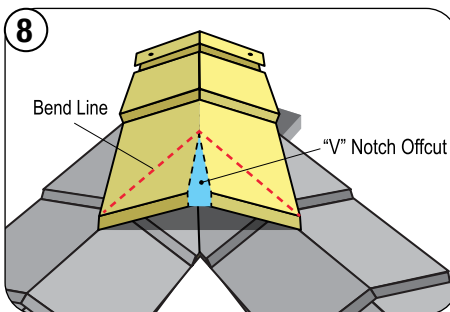

8 Fit ridge cap to overlap hip caps, as shown. Mark bend lines, V-notch and bend to create 3-D look.

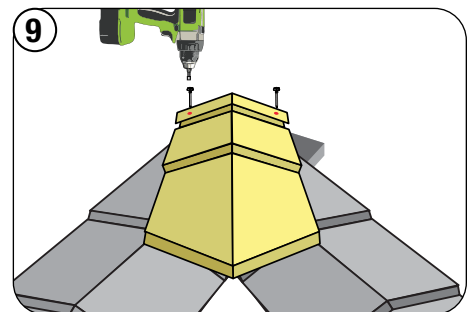


9 Fasten through the cap, barrier foam, panel and into the roof deck, with two fasteners per cap.



Trim Cap Screws should be of sufficient length to penetrate a minimum of 0.75" (19 mm) into the roof decking.



# GRANITE-RIDGE Shingle Installation Guidelines

## RIDGE TRIM CAPS SHINGLE - BARRIER FOAM METHOD (No continuous ridge venting)

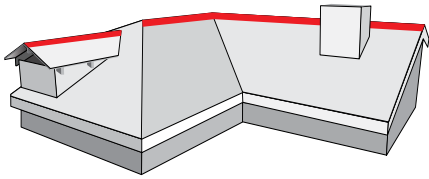


Caps Shingle or Cap Cottage can be installed with Barrier Foam.


If the ridge is long, start cap installation from both ends and create a custom cap at the center of the ridge.

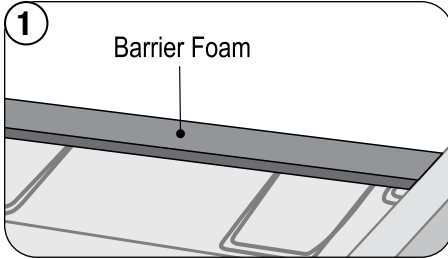

1  
Barrier Foam  
Install Barrier Foam roll across the ridge.

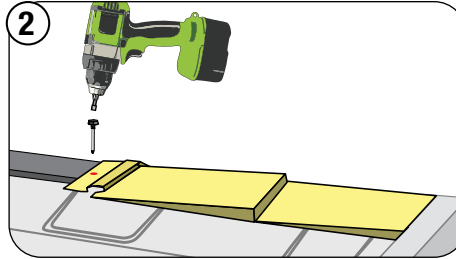


2  
At the rake and ridge intersection, cut and fit Cap Shingle into the Rake Cover. Fasten through the cap, barrier foam, panel and into the roof deck, with two fasteners per cap.

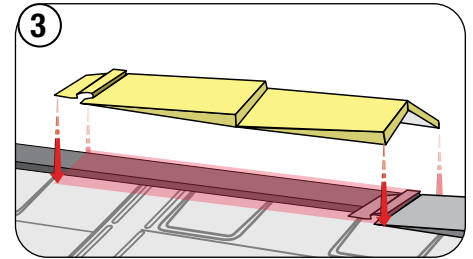


3  
Continue Caps Shingle installation across the ridge.

## RIDGE TRIM CAPS SHINGLE - CONTINUOUS RIDGE VENT


Quarrix Rigid Roll® 7" wide continuous ridge vent installed under Caps Shingle.

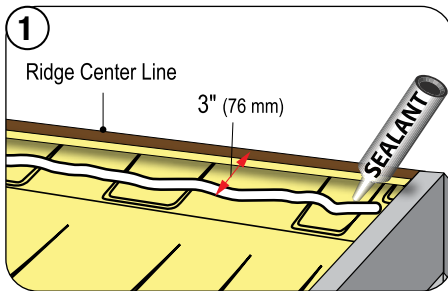


1  
Ridge Center Line  
3" (76 mm)  
SEALANT  
After installing ridge panel cuts for continuous ridge vent, apply a bead of Sealant (shown) or EmSeal tape 3" (76 mm) apart from the ridge center line.

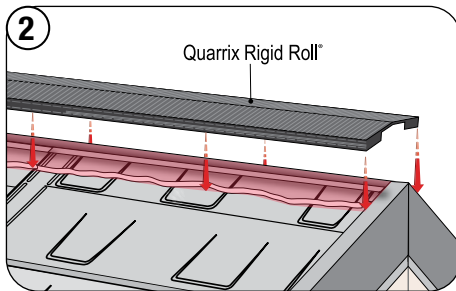

2  
Quarrix Rigid Roll®  
Install Quarrix® Rigid Roll® ridge vent across the ridge and fasten.

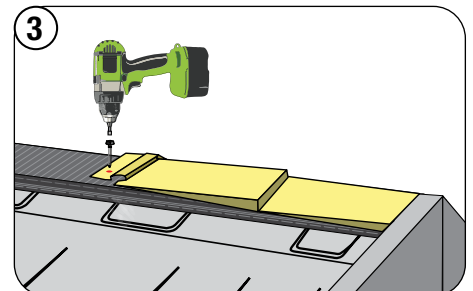

3  
At the rake and ridge intersection, cut and fit Cap Shingle into the Rake Cover. Fasten through the cap, Quarrix® Rigid Roll, panel and into the roof deck, with two fasteners per cap.

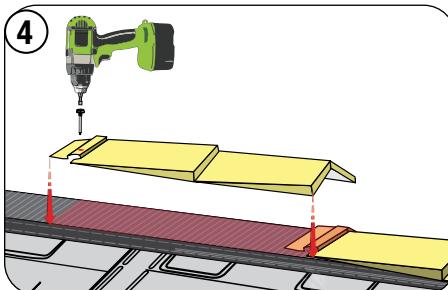

4  
Continue Caps Shingle installation across the ridge.




Trim Cap Screws should be of sufficient length to penetrate a minimum of 0.75" (19 mm) into the roof decking.





# GRANITE-RIDGE Shingle Installation Guidelines


## RIDGE TRIM CAPS COTTAGE - CONTINUOUS RIDGE VENT

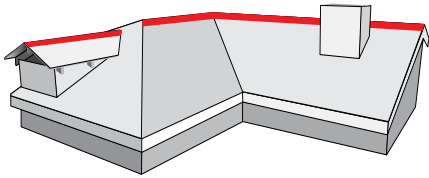


RidgeMaster® Plus 11" wide continuous ridge vent installed under Caps Cottage.

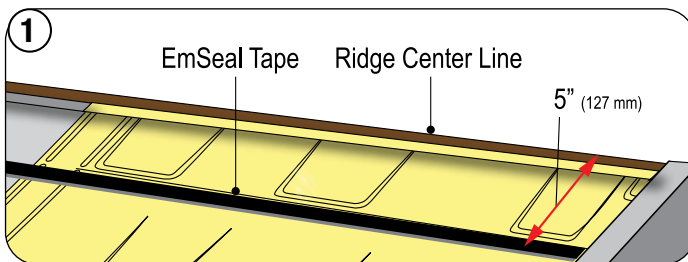


Install ridge panels. [See Page 19 for details with Continuous Ridge Vent](#). Apply EmSeal Tape (shown) or a bead of Sealant 5" (127 mm) apart from the ridge center line.

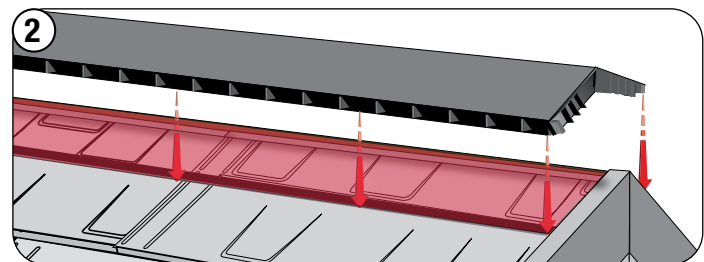

Install RidgeMaster® Plus ridge vent.

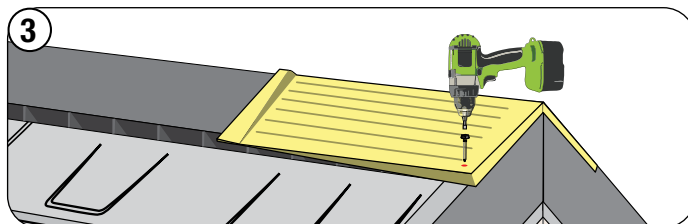

At the rake and ridge intersection, install Cap Cottage over the Rake Cover and fasten, as shown.

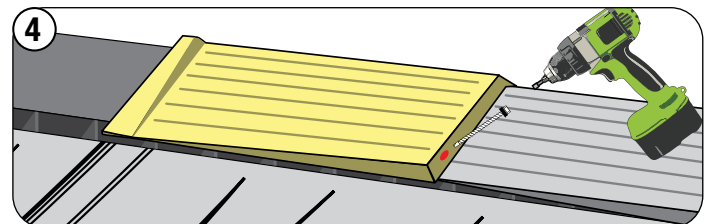

Continue installation of the Caps Cottage out across the ridge. Fasten each cap through the nose at an angle on each side of the center line through the ridge vent and into the decking, with two fasteners per cap.



*Trim Cap Screws should be of sufficient length to penetrate a minimum of 0.75" (19 mm) into the roof decking.*

## FINISHING TOUCHES



After completing the roof installation, check the overall job for areas where the coating is scuffed or marked during install. Apply Unified Steel™ adhesive and stone chip to provide a complete stone coat finish.

## HIGH VELOCITY HURRICANE ZONE (HVHZ) FASTENING GUIDELINES


We have simplified the ASCE 7 roof areas for high wind and HVHZ steep slope roofs (3:12 and greater) into three main areas; (1) FIELD, (2) PERIMETER & (3) CORNERS. Refer to the specific Evaluation Report or Product Approvals (i.e., Miami-Dade County Notice of Acceptance (NOA), Florida Product Approvals (FBC), Texas Department of Insurances (TDI) or Evaluation Report for your jurisdiction) for the selected panel profile (GRANITE-RIDGE Shingle) and install method (Direct-to-Deck) for fastener size, spacing and penetration into the roof deck or batten system.

**ROOF SLOPE: 3:12 Minimum**

**ROOF DECK: New Construction: 19/32" thick plywood or wood plank.  
Re-Roof: 15/32" thick plywood or wood plank.**

**UPLIFT DESIGN PRESSURE: 110 PSF**

## FIELD PANELS & PERIMETER AND CORNER PANELS HVHZ FASTENING PATTERN

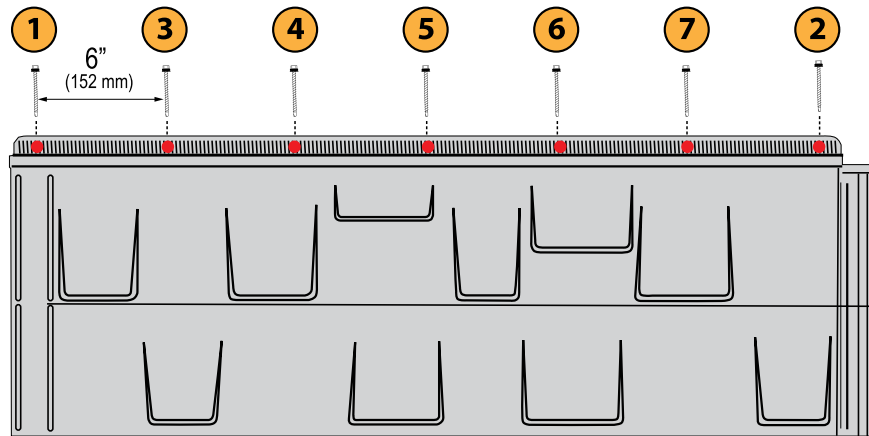

Fasten the panels with seven (7) #9-15 x 1.5" (38 mm) HWH shingle panel screws across the Fastening Flange of each panel. Fasteners are spaced 6-inches (152 mm) o.c. maximum. Fasteners shall penetrate the roof deck 0.75" (19 mm) minimum.



*FASTENING SEQUENCE shown is for the Left to Right layout direction; applicable to all panels and ensures the panels stay correctly aligned. Check local code for wind uplift requirements.*

## NOTES

[illegible]



Metal Roofing, Nationwide

800-728-4010  
[bestbuymetals.com](http://bestbuymetals.com)