



R-PANEL / PBR PANEL

R-Panel

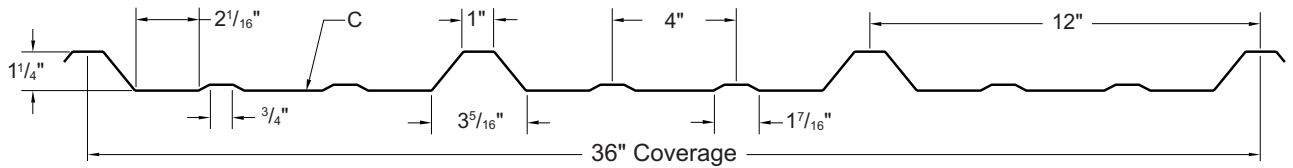

PBR-Panel

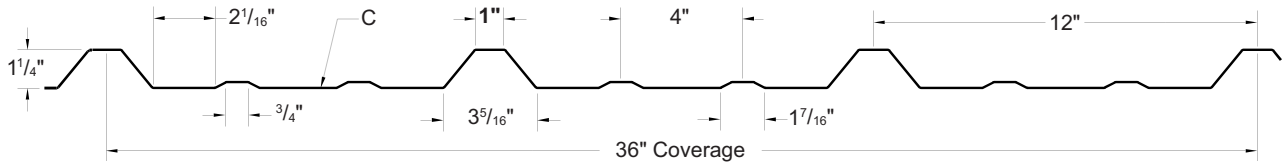

ARCHITECTURAL
COMMERCIAL
INDUSTRIAL
PANEL

DIRECT
FASTEN


36"
COVERAGE

MINIMUM
1:12 SLOPE

OPEN FRAMING OR
SOLID SUBSTRATE

PANEL OVERVIEW

- ▶ Finishes: Painted and Acrylic Coated Galvalume®
- ▶ Gauges: 26ga and 24ga standard
- ▶ 36" panel coverage, 1 1/4" rib height
- ▶ Applies over open framing or solid substrate
- ▶ Exposed fastened metal building panel
- ▶ Trapezoidal rib on 12" centers
- ▶ Minimum roof slope: 1:12

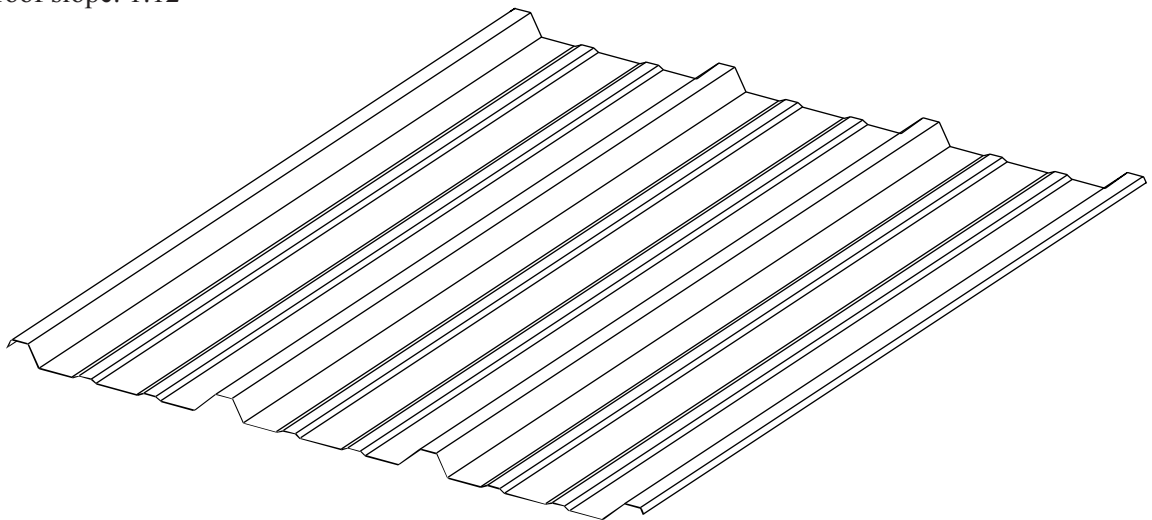


TESTING

- ▶ UL 2218, Class 4 Impact Resistance
- ▶ UL 790, Class A Fire Resistance Rating
- ▶ Florida Building Code Approved 7231.1

R-PANEL / PBR PANEL

ATTACHMENT DETAIL

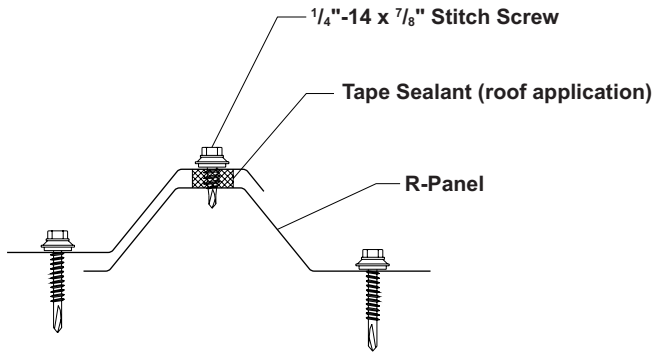

FASTENING PATTERNS

Fastening Pattern - Interior of panel



Fastening Pattern - Ends of panel



GENERAL INFORMATION

► Slope

The minimum recommended slope for R-Panel is 1:12. We recommend that in all roof applications, sealants be used on all sidelaps with stitch screw 1'-0" on center.

► Substructure

R-Panel is designed to be utilized over open structural framing, but can easily be used with a solid substrate. To avoid panel distortion, use a properly aligned and uniform substructure.

► Coverage

R-Panels are available in a 1 1/4" rib height with a coverage width of 36".

► Length

Minimum factory cut length is 3'-0". Maximum recommended panel length is 45'-0". Longer panels require additional consideration in packaging, shipping, and installing. Please consult Best Buy Metals for recommendations.

► Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.

► Availability

Finishes: Acrylic Coated Galvalume® or Painted

Gauges: 26ga and 24ga standard

SECTION PROPERTIES

ALLOWABLE UNIFORM LIVE LOADS PSF (3 or More Equal Spans)

Ga.	Width (in.)	Yield KSI	Weight PSF	Top in Compression		Bottom in Compression		Inward (Gravity / Deflection) Load						Outward Uplift (Stress) Load					
				Ixx In ⁴ /ft	Sxx In ³ /ft	Ixx In ⁴ /ft	Sxx In ³ /ft	2'	3'	4'	5'	6'	7'	2'	3'	4'	5'	6'	7'
26	36"	80	0.91	0.0360	0.0358	0.0307	0.0449	250	125	73	48	28	18	286	138	80	52	36	27
24	36"	50	1.17	0.0567	0.0578	0.0443	0.0609	328	152	87	56	39	27	419	193	110	71	49	36
22	36"	50	1.51	0.0800	0.0855	0.0633	0.0808	449	205	116	75	52	38	630	288	164	105	73	54

- Theoretical section properties have been calculated per AISI 2001 "Specification for the Design of Cold-formed Steel Structural Members." Ixx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2001 specifications considering bending, shear, combined bending and shear, deflection, and applicable testing when available. Allowable load considers the worst case of 3 and 4 equal span conditions. Allowable load does not address web crippling or fasteners/support connection and panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.