


VERTICAL SEAM

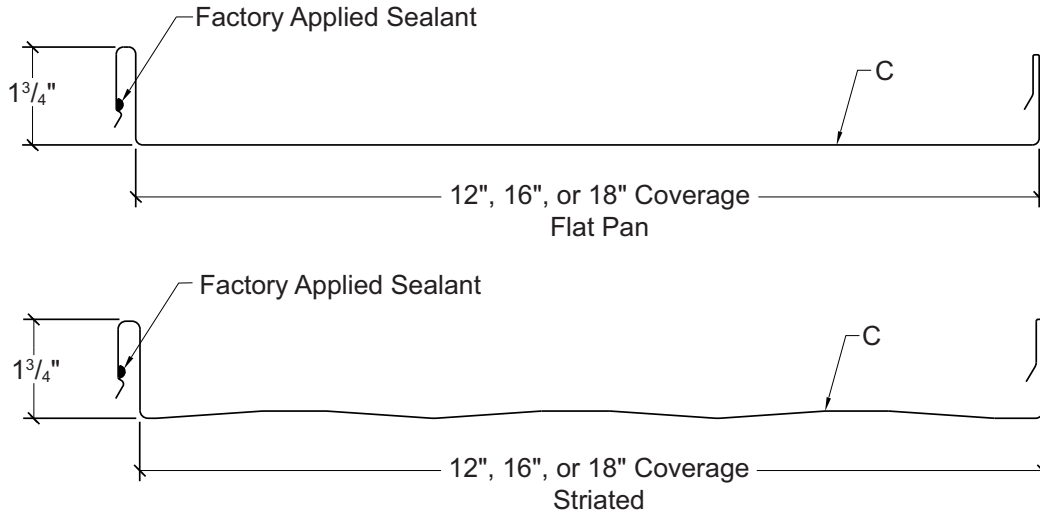

ARCHITECTURAL
COMMERCIAL
PANEL

CONCEALED
FASTENERS


12", 16", OR 18"
COVERAGE

MINIMUM
3:12 SLOPE

OPEN FRAMING OR
SOLID SUBSTRATE

PANEL OVERVIEW

- ▶ Finishes: Kynar 500 (PVDF), MS Colorfast45[®], and Acrylic Coated Galvalume[®]
- ▶ Gauges: 26 and 24ga standard, 22ga optional
- ▶ 12", 16", or 18" panel coverage, 1³/₄" rib height
- ▶ Concealed clip designed to accommodate thermal movement
- ▶ Architectural/structural integral standing seam panel
- ▶ Applies over open framing or solid substrate
- ▶ Factory applied side lap sealant
- ▶ Snap together panel system

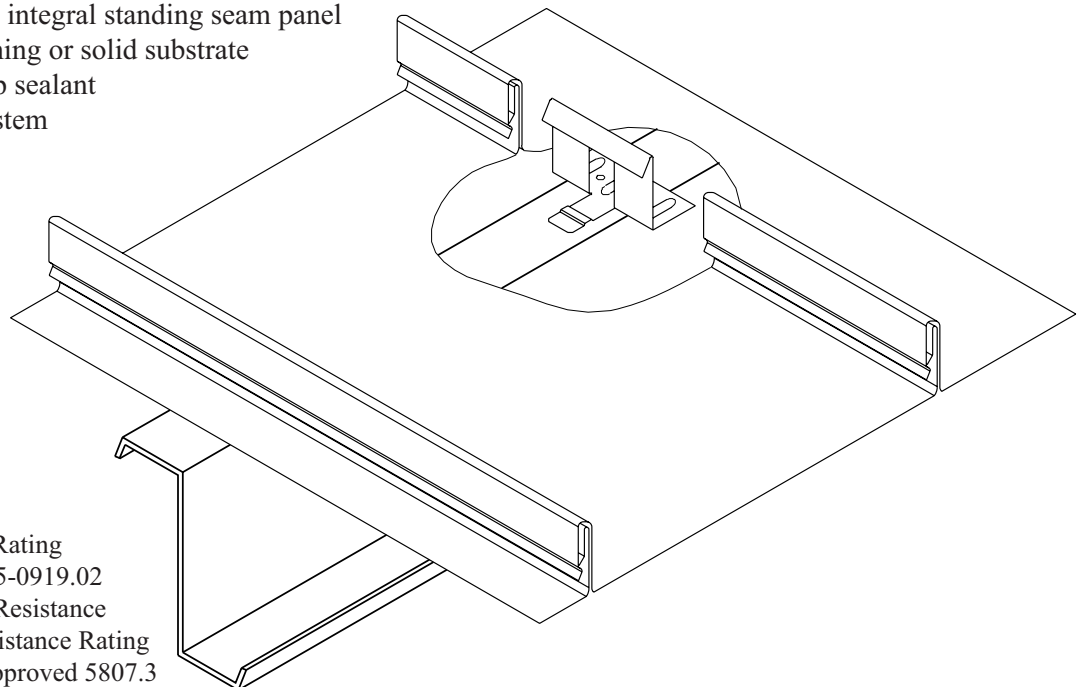

TESTING

- ▶ UL 263, Fire Resistance Rating
- ▶ Miami-Dade Approved 05-0919.02
- ▶ UL 2218 Class 4 Impact Resistance
- ▶ UL 790, Class A Fire Resistance Rating
- ▶ Florida Building Code Approved 5807.3
- ▶ ASTM E-283 Air Infiltration Approved
- ▶ ASTM E-331 Water Penetration Approved
- ▶ CEGS-07416 US Army Corps of Engineers Rated-ASTM E-1592
- ▶ UL 580, Class 90 Wind Uplift, Construction Numbers 254, 255, 261, 303, 342, 343, 435

