








## An *effective* and *versatile* soffit and fascia panel

A concealed-fastener panel with clean lines that complement a building's eaves and walls. The 12" width offers flexibility in design and is available in solid or vented, with a flat appearing finish or with one stiffening groove.

- Excellent 1" deep soffit panel.
- 12" wide panel with interlocking seam.
- Smooth finish or with one "V" groove.
- Fastens directly to the sub-structure.

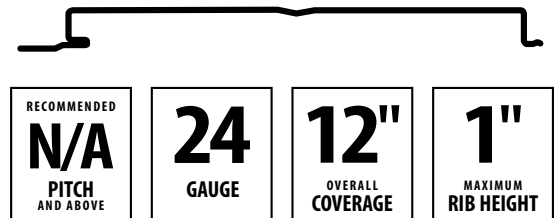

## Choose the panel that best fits your project.

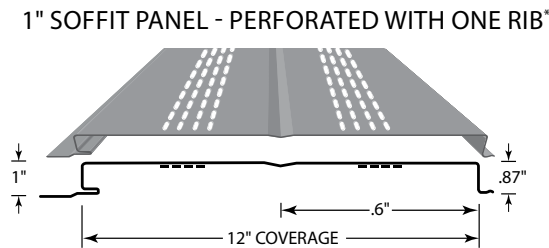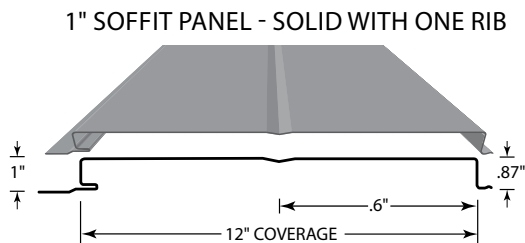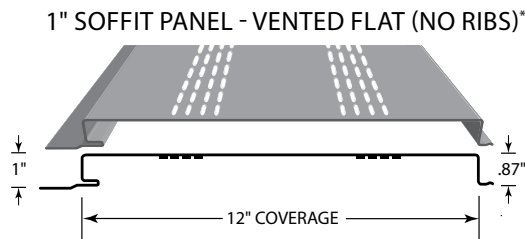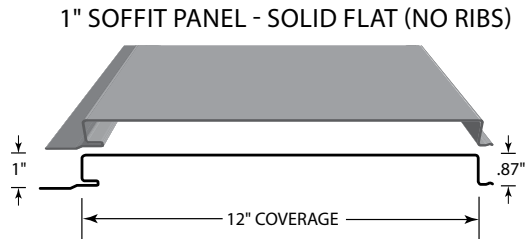

### MINIMUM SPECIFICATIONS FOR PRIME PAINTED PANELS

**GAUGE**  
24 ga.

**STEEL THICKNESS**  
0.023"

**PAINT THICKNESS**  
Top coat paint: .70 mil  
Top coat primer: .30 mil  
Bottom coat backer: .35 mil  
Bottom coat primer: .35 mil

**TOTAL THICKNESS**  
0.0247"

**RUST PROTECTANT SUBSTRATE**  
Galvalume® AZ50

**STEEL STRENGTH**  
50,000 PSI min

**PAINT SYSTEM**  
Fluropon® - Kynar 500/Hylar 5000®

**WARRANTY**  
40-yr paint adhesion 30-yr.  
chalk and fade  
20-yr. Galvalume perforation\*

\* Due to the penetration of the steel's protective coating, vented profiles are subject to rust and not covered by a perforation warranty.