


Mechanical Seam 200

Provides superior durability in demanding environments.



Mechanical Seam 200 is a high-performance mechanically seamed standing seam roofing system engineered for maximum weather protection, structural strength, and installation versatility. Featuring precision mechanical seams for superior leak and moisture control.

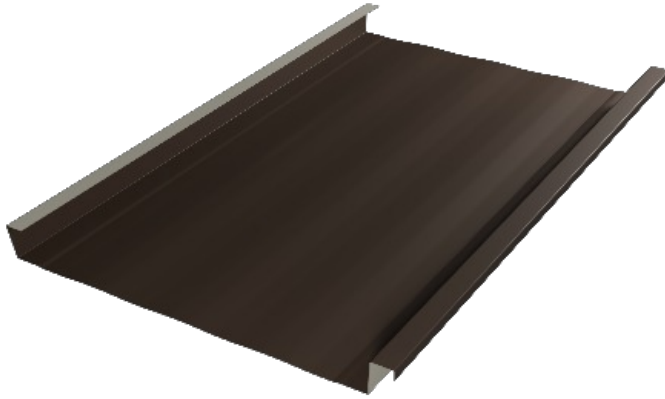


Design & Size



We provide Mechanical Seam 200 custom cut to the inch per specifications. Any length is available from 3' up to 40'. Floating clips allow for unlimited expansion.

Mechanical Seam 200's design features 2" high ribs, spaced 14.1875" on center. Thickness options include 26 and 24 gauge.

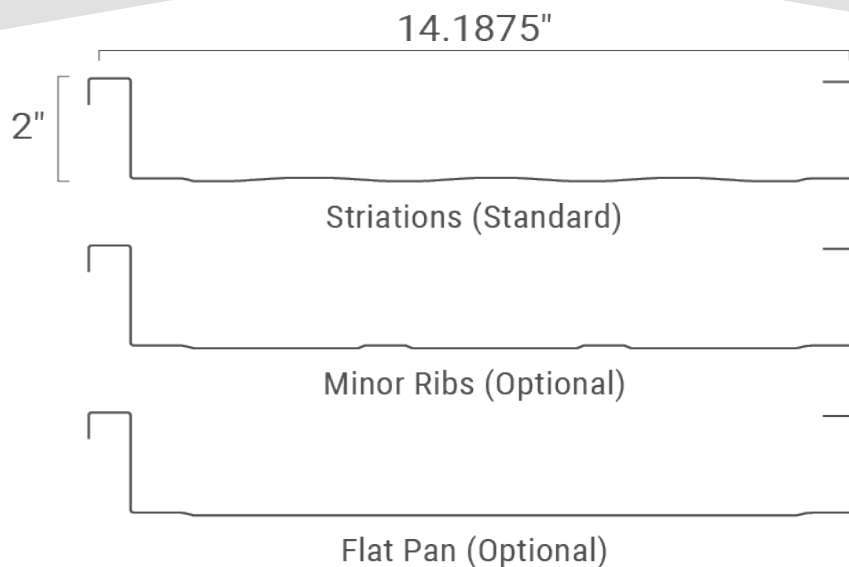

Warranty & Finish



Painted Mechanical Seam 200 carries a 50 year paint warranty and 30 year fade/chalk warranty. Unpainted Galvalume carries a 45 year warranty.

The painted option is a baked on enamel paint over primer and Galvalume. The non-painted Galvalume option is 45% zinc and 55% aluminum with a clear acrylic overcoat.



Purpose & Use

Mechanical Seam 200 is a type of standing seam chosen for its superior weather resistance and long term performance for high end residential and commercial projects.

Mechanical Seam 200 is designed for installation over solid decking slopes as low as 2:12 and for open frame (steel) at .5:12. A floating design allows for longer panels and end-lapping.



MINIMUM SLOPE

.5:12 (Steel)
2:12 (Aluminum)



SUBSTRATE

Open Frame (Steel)
Solid Deck



FLORIDA APPROVALS

Florida Building Code
(HVHZ if 24ga, Non-HVHZ if 26ga)



INTENT

Residential
Commercial



CATEGORY

Standing Seam
Mechanical Seam